#231

OSO-5

SOLAR E.U.V. RADIATION

69-006A-08A

28 tapes

OSO 5

REDUCED, MERGED 3-CH.UV DATA

69-006A-08A

This data set has been restored. There were originally 28 7-track, 556 BPI tapes written in Binary. There are four restored tapes. The DR tapes are 3480 cartridges and the DS tapes are 9-track, 6250 BPI. The original tapes were created on a 6400 computer. The DR and DS numbers along with the corresponding D numbers are as follows:

DR#	DS#	D#	FILES	TIME SPAN
DR004190	DS004190	D012182	1 - 16	02/05/69 - 02/19/69
		D012183	17 - 98	03/03/69 - 03/28/69
		D012184	99 - 185	04/05/69 - 05/01/69
		D012185	186 - 271	05/06/69 - 06/04/69
		D012186	272 - 403	06/04/69 - 07/07/69
		D012187	404 - 487	07/08/69 - 08/05/69
		D012188	485 - 554	08/16/69 - 09/10/69
		D012189	555 - 631	09/11/69 - 10/14/69
		D012190	632 - 712	10/15/69 - 11/16/69
		D012191	713 - 784	11/17/69 - 12/13/69
DR004191	DS004191	D012192	1 - 92	12/26/69 - 01/22/70
		D012193	93 - 208	01/23/70 - 02/23/70
		D012194	209 - 293	02/24/70 - 03/28/70
		D012195	294 - 370	03/29/70 - 04/24/70
		D012196	371 - 483	05/02/70 - 06/03/70
		D012197	484 - 569	06/04/70 - 06/30/70
DR004192	DS004192	D012198	1 - 105	07/06/70 - 08/02/70
		D012199	106 - 231	08/09/70 - 09/10/70
		D012200	232 - 342	09/11/70 - 10/13/70
		D012201	343 - 469	10/14/70 - 11/16/70
		D012202	470 - 584	11/17/70 - 12/19/70
		D012203	585 - 695	12/19/70 - 01/21/71
DR004193	DS004193	D012204	1 - 104	01/28/71 - 02/22/71
		D012205	105 - 224	02/24/71 - 03/28/71
		D012206	225 - 312	03/29/71 - 04/30/71
		D012207	313 - 424	04/30/71 - 06/01/71
		D012208	425 - 514	06/03/71 - 07/05/71
		D012209	515 - 559	07/06/71 - 07/19/71

REQUEST AGENT	RASH NO.	ACQ. AGENT
ROP	RB4218	CDW

OSO-5

69-006A-08A

SOLAR E.U.V. RADIATION

This data set consists of 28 merged Solar E.U.V. Radiation data tapes. These tapes were created on a CDC 6400 Computer at 556 BPI, Binary, 7-track.

All the tapes are multi-filed with one orbit of data per file. Each file begins with one label record of 50 CDC 60-bit words followed by variable length data records. Each data record (one minute of data) contains one attitude/orbit record and a variable number of IPAGE (spacecraft data) records.

The time spans for the tapes are as follows:

D#	C#	TIME SPAN	ORBITS
D-12182	C-09444	2/05/69 - 2/19/69	203- 426
D-12183	C-09445	3/03/69 - 3/28/69	612- 971
D-12184	C-09446	4/05/69 - 5/01/69	1105-1492
D-12185	C-09447	5/06/69 - 6/04/69	1556-1995
D-12186	C-09448	6/04/69 - 7/07/69	2007-2497
D-12187	C-09449	7/08/69 - 8/05/69	2510-2941
D-12188	C-09450	8/16/69 - 9/10/69	3100-3487
D-12189	C-09451	9/11/69 - 10/14/69	3500-3989
D-12190	C-09452	10/15/69 - 11/16/69	4004-4494
D-12191	C-09453	11/17/69 - 12/13/69	4505-4902
D-12192	C-09454	12/26/69 - 1/22/70	5100-5498
D-12193	C-09455	1/23/70 - 2/23/70	5512-5987
D-12194	C-09456	2/24/70 - 3/28/70	6000-6490
D-12195	C-09457	3/29/70 - 4/24/70	6502-6891
D-12196	C-09458	5/02/70 - 6/03/70	700-7497

D#	C#	TIME SPAN	ORBITS
D-12197	C-09459	6/04/70 - 6/30/70	7512-7796
D-12198	C-09460	7/06/70 - 8/02/70	8000-8398
D-12199	C-09461	8/09/70 - 9/10/70	8500-8992
D-12200	C-09462	9/11/70 - 10/13/70	9005-9492
D-12201	C-09463	10/14/70 - 11/16/70	9506-9998
D-12202	C-09464	11/17/70 - 12/19/70	10011-10499
D-12203	C-09465	12/19/70 - 1/21/71	10500-10990
D-12204	C-09466	1/28/71 - 2/22/71	11109-11452
D-12205	C-09467	2/24/71 - 3/28/71	11506-11998
D-12206	C-09468	3/29/71 - 4/30/71	12005-12500
D-12207	C-09469	4/30/71 - 6/01/71	12500-12989
D-12208	C-09470	6/03/71 - 7/05/71	13003-13495
D-12209	C-09471	7/06/71 - 7/19/71	13508-13700

69-006A-08A

LABEL RECORD FORMAT

There is one label record at the beginning of each file of data on these tapes. The format for this record is as follows.

WORD	DESCRIPTION	FORMAT
1	Satellite ID	I5
2	Begin orbit number	I6
3	End orbit number	I6
4	Begin year	I2
5	End year	I2
6	Begin day of year	I3
7	End day of year	I3
8	Begin seconds of day	I5
9	End seconds of day	I5
10	No. of 1-min records in file	I3
11	Pitch (Radians)	F7.4
12	Spin (Rev/sec)	E10.3
13	1st calibration value-CH1	I8
14	1st calibration value-CH2	I8
15	1st calibration value-CH3	I8
16	2nd calibration value-CH1	I8
17	2nd calibration value-CH2	I8
18	2nd calibration value-CH3	I8
19	Time (ms) for 1st calibration	I8
20	Record number - 1st calibration	I3
21	Line number - 1st calibration	I2
22	Time (ms) - 2nd calibration	I8
23	Record number - 2nd calibration	I3
24	Line number - 2nd calibration	I2
25	Time (ms) - 3rd calibration	I8

WORD	DESCRIPTION	FORMAT
26	Record number - 3rd calibration	I3
27	Line number - 3rd calibration	I2
28	Time (ms) - 4th calibration	I8
29	Record number - 4th calibration	I3
30	Line number - 4th calibration	I2
31	Time (ms) - 5th calibration	I8
32	Record number - 5th calibration	I3
33	Line number - 5th calibration	I2
34	Midday count, CH1	I8
35	Midday count, CH2	I8
36	Midday count, CH3	I8
37	Total counts, CH1	I10
38	Total counts, CH2	I10
39	Total counts, CH3	I10
40	Number of calibrations in file	I3
41	Exposure time (seconds)	I10
42-50	Unused	

Midday counts (words 34-36) are measured at 13 minutes after sunrise.

69-006A-08A

DATA RECORD

FORMAT

Each data record contains both orbit/attitude and IPAGE data. there is one orbit/attitude record per physical record. The number of IPAGE records in each physical record is found in word 2 of each physical record.

The formats for these records are:

Word	Description	Format
1	Number of words in IPAGE array	I3
2	Number of IPAGE records in this physical rec.	I3
3	Day count	F
4	Milliseconds of day	F
5	Sat. position vector, X-component (km)	F
6	Sat. position vector, Y-component (km)	F
7	Sat. position vector, Z-component (km)	F
8	Right ascension of Sat. pos. vector (degrees)	F
9	Declination of Sat. pos. vector (degrees)	F
10	Velocity vector, X-component (km/sec)	F
11	Velocity vector, Y-component (km/sec)	F
12	Velocity vector, Z-component (km/sec)	F
13	R.A. of velocity vector (degrees)	F
14	Delination of velocity vector (degrees)	F
15	Geodetic latitude (degrees)	F
16	Geodetic longitude (degrees)	F
17	Geodetic altitude (degrees)	F
18	Unit solar vector, X-component	F
19	Unit solar vector, Y-component	F
20	Unit solar vector, Z-component	F

Word	Description	Format
21	R.A. of unit solar vector (degrees)	F
22	Declination of unit solar vector (degrees)	F
23	MC Illwains "L' parameter (Earth radii)	F
24	Magnetic fields length (Gauss)	F
25	Unit magnetic vector, X-component	F
26	Unit magnetic vector, Y-component	F
27	Unit magnetic vector, Z-component	F
28	R.A. of magnetic vector (degrees)	F
29	Declination of magnetic vector (degrees)	F
30	Pitch angle (Radians)	F
31	Roll angle (Radians)	F
32	Aspect angle (Radians)	F
33	ΔT since digital subcom word 1 (ms)	F
34	Roll-axis orientation, X-component	F
35	Roll-axis orientation, Y-component	F
36	Roll-axis orientation, Z-component	F
37	R.A. of roll-axis (degrees)	F
38	Declination of roll-axis (degrees)	F
39	Pitch-axis orientation, X-component	F
40	Pitch-axis orientation, Y-component	F
41	Pitch-axis orientation, Z-component	F
42	R.A. of pitch-axis (degrees)	F
43	Declination of pitch-axis (degrees)	F
44	Yaw/spin-axis orientation, X-component	F
45	Yaw/spin-axis orientation, Y-component	F
46	Yaw/spin-axis orientation, Z-component	F
47	R.A. of Yaw/spin-axis (degrees)	F
48	Declination of Yaw/spin-axis (degrees)	F
49	Aspect/ref.-axis orientation, X-compon	F

Word	Description	Format
50	Aspect/ref.-axis orientation, Y-component	F
51	Aspect/ref.-axis orientation, Z-component	F
52	R.A. of aspect/ref.-axis (degrees)	F
53	Declination of aspect/ref.-axis (degrees)	F
54	Spin rate (Rev./sec.)	F
55	Data type indicator (1.0=even min. data)	F
56	Orbit number	F
57	Orbit begin (Day count)	F
58	Orbit begin (milliseconds of day)	F
59	Orbit end (Day count)	F
60	Orbit end (milliseconds of day)	F
61	Day/night indicator (Geometric) 1.0=day; 0.0=night	F
62	Sunlight exit (Geometric) (Day count)	F
63	Sunlight exit (Geometric) (ms of day)	F
64	Sunlight entrance (Geometric) (Day count)	F
65	Sunlight entrance (Geometric) (ms of day)	F
66	Unused	
67	Unused	

The IPAGE record consists of 15 items of data packed into 7-60 bit words.

Item	Description	Format
1	Time	I10
2	Code	I5
3	Sensor 1	I8
4	Sensor 2	I8
5	Sensor 3	I8
6	Background 1	I5
7	Background 2	I5
8	Background 3	I5

Word	Description	Format
9	Error Word	02
10	Digital data	08
11	Digital data	08
12	Digital data	08
13	Wheel data	08
14	Wheel data	08
15	Wheel data	08

The data are packed as follows:

Word	Description
1 bits 1-40	Time (ms)
bits 41-60	Code
2 bits 1-30	Sensor 1
bits 31-60	Sensor 2
3 bits 1-30	not used
bits 31-60	Sensor 3
4 bits 1-20	Background 1
bits 21-40	Background 2
bits 31-60	Background 3
5 bits 1-18	Error Word
bits 19-39	Digital data
bits 40-60	Digital data
6 bits 1-18	not used
bits 19-39	Digital data
bits 40-60	Wheel data
7 bits 1-18	not used
bits 19-39	Wheel data
bits 40-60	Wheel data

CORRELATED DATA TAPE (CDT)
RECORDS FORMAT

69-006A-08A

WHL 1 (HV #1 MONITOR)

WHL 2 (HV #2 MONITOR)

WHL 3 (HV #3 MONITOR)

WHL 4 OPTICS TEMP.

WHL 5 ELECTRONICS TEMP.

WHL 6 HUB TEMP.

WHL 10 RIB TEMP.

WHL 14 BOTTOM SKIN TEMP.

WHL 19 TOP SKIN TEMP.

WHL 21 RIM SKIN TEMP.

WHL 40 DECK TEMP.

-ITUDE/ORBIT RECORD (BINARY - FLOATING POINT)

(SHOWN AS 36-BIT REPRESENTATION; DUMTAPE DISPLAYS IN 60-BIT GROUPS WITH 36-BIT WORDS PACKED CONTIGUOUSLY AS FOLLOWS:

1ST 36-BIT WD	2ND 36-BIT	1ST 60-BIT WORD
WD	3RD 36-BIT WD	4TH 2ND 60-BIT WORD
36-BIT WD	5TH 36-BIT WD	3RD 60-BIT WORD

ETC.)

1.		TIME 1 - DAY COUNT
2.		TIME 2 - MILLISECONDS OF DAY
3.		SATELLITE POSITION VECTOR, X-COMPONENT (KM.)
4.		" " " Y- " "
5.		" " " Z- " "
6.		R.A. OF SATELLITE POS. VECTOR (DEGREES)
7.		DECLINATION OF " " " "
8.		VELOCITY VECTOR, X-COMPONENT (KM./SEC.)
9.		" " Y- " "
		" " Z- " "

CORRELATED DATA TAPE (CDT)
RECORDS FORMAT

CONT'D

11		R.A. OF VELOCITY VECTOR (DEGREES)
12		DECLINATION OF " " "
13		GEODETIC LATITUDE "
14		" LONGITUDE "
15		" ALTITUDE "
16		UNIT SOLAR VECTOR, X-COMPONENT
17		" " " , Y- "
18		" " " , Z- "
19		R.A. OF UNIT SOLAR VECTOR (DEGREES)
20		DECLINATION " " " "
21		McILLWAIN'S "L" PARAMETER (EARTH RADII)
22		MAGNETIC FIELD STRENGTH (GAUSS)
23		UNIT MAGNETIC VECTOR, X-COMPONENT
24		" " " Y- "
25		" " " Z- "
26		R.A. OF MAGNETIC VECTOR (DEGREES)
27		DECLINATION " " "
28		PITCH ANGLE (RADIANS)
29		ROLL ANGLE "
30		ASPECT ANGLE "
31		ΔT SINCE DIGITAL SUBCOM WORD 1 (M
32		ROLL-AXIS ORIENTATION, X-COMPONENT
33		" " " Y "
34		" " " Z "
35		R.A. OF ROLL-AXIS (DEGREES)
36		DECLINATION " " "
37		PITCH-AXIS ORIENTATION, X-COMPONENT
38		" " " Y- "
39		" " " Z- "
40		R.A. OF PITCH-AXIS (DEGREES)
41		DECLINATION " " "
42		YAW/SPIN-AXIS ORIENTATION, X-COMPONENT
43		" " " " Y "
44		" " " " Z "
45		R.A. OF YAW/SPIN-AXIS (DEGREES)
46		DECLINATION " " " "
47		ASPECT REF.-AXIS ORIENTATION, X-COMPONENT
48		" " " " Y "
49		" " " " Z "
50		R.A. OF " " " (DEGREES)
51		DECLINATION " " "
52		SPIN RATE (REV./SEC.)
53		DATA TYPE INDICATOR (1.0=EVEN MIN. D
54		ORBIT NUMBER
55		ORBIT BEGIN (DAY COUNT)

CONT'D NEXT PG

CORRELATED DATA TAPE (CDT)
RECORDS FORMAT

CONT'D

56	ORBIT BEGIN	(MILLISECONDS OF DAY)
57	ORBIT END	(DAY COUNT)
58	ORBIT END	(MILLISECONDS OF DAY)
59	DAY/NIGHT INDICATOR (GEOMETRIC)	[illegible]
60	SUNLIGHT EXIT (GEOMETRIC)	(DAY COUNT)
61	" " "	(MS. OF DAY
62	" ENTRANCE "	(DAY COUNT)
63	" " "	(MS. OF [illegible]
64	UNUSED	
65	UNUSED	
66	ABOVE 65-WORD BLOCK FORMAT REPEATED FOR TOTAL OF 8 BLOCKS (1 MIN. EACH)	
520		

ALL ATTITUDE/ORBIT DATA IS IN IBM 7094 (36-BIT) FLOATING POINT FORM:

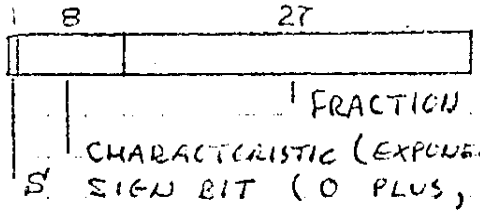

ALL CARTESIAN COORDINATES REFER TO THE CELESTIAL SYSTEM:

X FIRST POINT OF ARIES
Y ORTHOGONAL TO X AND Z
Z POLARIS

LABEL PROCESSING

BCD

A(1)	1	2	3	4	5	6	7	8	9	10
A(2)	11	12	13	14	15	16	17	18	19	20
A(3)	21	22	23	24	25	26	27	28	29	30
A(4)	31	32	33	34	35	36	37	38	39	40
A(5)	41	42	43	44	45	46	47	48	49	50

DECØDE IN ØSØF DRIVER

INTEGER

LABEL (1)	COLS. 1-5	I5	SATELLITE ID. NUMBER
2	COLS. 6,7	I2	YEAR
3	COLS. 8-10	I3	STATION NUMBER
4	COLS. 11-14	I4	STATION TAPE NUMBER
5	COLS. 15,16	I2	ANALOG FILE NUMBER
6	COLS. 17,18	I2	BUFFER FILE NUMBER
7	COLS. 19-21	I3	DAY OF YEAR
8	COLS. 22-24	I3	REAL-TIME FRAME PERIOD
9	COL. 25	I1	TIME ACCURACY CODE
10	COLS. 26-30	I5	START TIME (SECONDS)
11	COL. 31	I1	UNPROCESSIBLE DATA FLAG
12	COLS. 32-36	I5	STOP TIME (SECONDS)
13	COLS. 37,38	I2	EXPERIMENTER NUMBER
14	COLS. 43,44	I2	EDIT FILE
15	COLS. 45-49	I4	EDIT TAPE NUMBER

COLS. 39-42 UNUSED

NOLD

UNPACKING SCHEME FOR DIGITAL SPACE-CRAFT DATA.

C(1)	DAY					
C(2)	MILLISECONDS					
C(3)	WORD 9	WORD 36	WORD 37	WORD 41	SPARE	GROUP
C(4)	SPARE	WORD 9	WORD 36	WORD 37	WORD 41	
C(5)	SPARE	SPARE	SPARE	SPARE	SPARE	
⋮	17 MORE GROUPS					
C(73)						

UNPD SUBROUTINE

DSM(1)	DAY		
DSM(2)	MILLISECONDS		
⋮	9_{10}	ZERO	WORD 9
	36_{10}	ZERO	WORD 36
	37_{10}	ZERO	WORD 37
	41_{10}	ZERO	WORD 41
	0_{10}	ZERO	SPARE
	ZERO		
	MILLISECONDS		
	9_{10}	ZERO	WORD 9
	36_{10}	ZERO	WORD 36
	37_{10}	ZERO	WORD 37
	41_{10}	ZERO	WORD 41
	0_{10}	ZERO	SPARE
	ZERO		
⋮	17 MORE GROUPS		
DSM(253)			

GROUP 1, FIRST HA

GROUP 1, SECOND HA

RAW

UNPACKING SCHEME FOR WHEEL SPACE-CRAFT DATA.

B(1)	DAY					
B(2)	MILLISECONDS					
B(3)	WORD 1	WORD 2	WORD 3	WORD 4	WORD 5	GROUP
B(4)	WORD 8	WORD 10	WORD 14	WORD 19	WORD 21	
B(5)	WORD 40	SPARE	SPARE	SPARE	SPARE	
B(6)	WORD 1	WORD 2	WORD 3	WORD 4	WORD 5	
B(7)	WORD 8	WORD 10	WORD 14	WORD 19	WORD 21	
B(8)	WORD 40	SPARE	SPARE	SPARE	SPARE	
...	17 MORE GROUPS					
B(127)						

UNPW SUBROUTINE

WHL(1)	DAY			
WHL(2)	MILLISECONDS			
⋮	1_{10}	ZERO	WORD 1	GROUP 1, FIRST MA
	2_{10}	ZERO	WORD 2	
	3_{10}	ZERO	WORD 3	
	4_{10}	ZERO	WORD 4	
	5_{10}	ZERO	WORD 5	
	8_{10}	ZERO	WORD 8	
	10_{10}	ZERO	WORD 10	
	14_{10}	ZERO	WORD 14	
	19_{10}	ZERO	WORD 19	
	21_{10}	ZERO	WORD 21	
	40_{10}	ZERO	WORD 40	
	ZERO			GROUP 1, SECOND MA
	ZERO			
WHL(505)	17 MORE GROUPS			

UNPACKING SCHEME FOR ATTITUDE/ORBIT DATA.

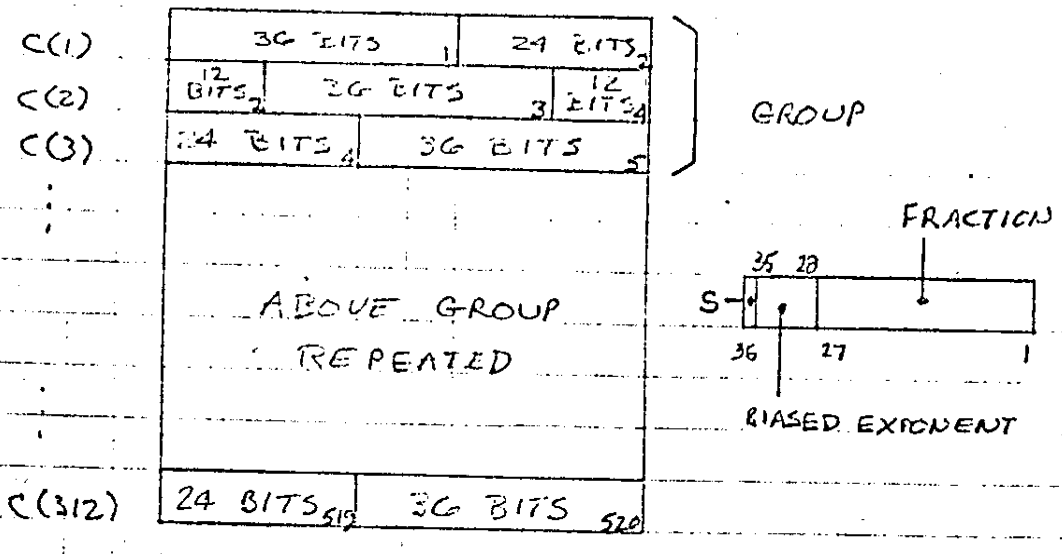

UNPAC36 SUBROUTINE

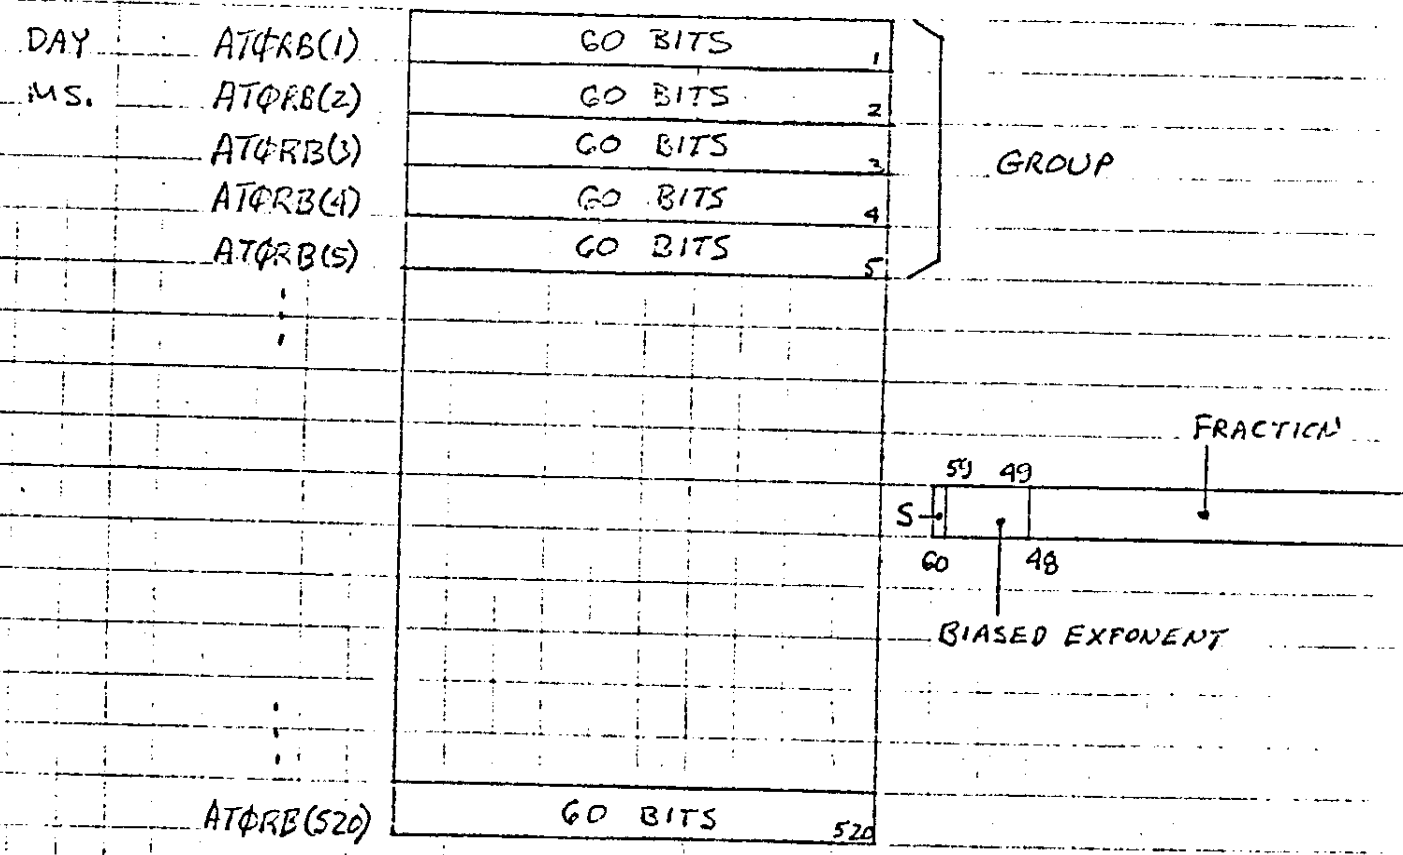

EIGHT 1-MINUTE SETS OF 65 WORDS PER SET.

PAGE

UNPACKING SCHEME FOR SPACECRAFT MAIN FRAME DATA.

A(1) OR B(1)	TIME WORD 1					1 GROUP OF TEN
A(2) OR B(2)	TIME WORD 2					
	1	2	3	4	5	192 12-BIT DATA SAMPLES
	6	7	8	9	10	
	11	12	13	14	15	
						8 12-BIT ZERO FILL SPARE
	191	192	S	S	S	
A(42) OR B(42)	S	S	S	S	S	
	TIME WORD 1					9 MORE GROUPS
	TIME WORD 2					
	1	2	3	4	5	
A(420) OR B(420)	S	S	S	S	S	

UNP12 SUBROUTINE

IWORK(1)	TIME WORD 1	1 GROUP OF TEN
IWORK(2)	TIME WORD 2	
	ZERO	1
	ZERO	2
	ZERO	3
IWORK(193)	ZERO	191
IWORK(194)	ZERO	192
	TIME WORD 1	9 MORE GROUP
	TIME WORD 2	
	ZERO	1
IWORK(1940)	ZERO	192

ROW

IWORK (1)	TIME WORD 1	
IWORK (2)	TIME WORD 2	
⋮	ZERO	1
	ZERO	2
	⋮	
⋮	ZERO	191
IWORK (194)	ZERO	192
⋮	TIME WORD 1	
	TIME WORD 2	
	ZERO	1
	⋮	
IWORK (1940)	ZERO	192

FIND SUBROUTINE

ITEMP (1)	TIME IN MILLISECONDS
ITEMP (2)	CODE
⋮	SENSOR 1 L.O. BITS
	SENSOR 1 H.O. BITS
	SENSOR 2 L.O. BITS
	SENSOR 2 H.O. BITS
	SENSOR 3 L.O. BITS
	SENSOR 3 H.O. BITS
	BACKGROUND 1
	BACKGROUND 2
⋮	BACKGROUND 3
ITEMP (12)	SPARE

IPAGE ARRAY IS BUILT IN ØUT SUBROUTINE FROM DSM AND WHL ARRAYS AND IN DASSMBL SUBROUTINE FROM ITEMP ARRAY.

	LINE l		LINE l+1		LINE l+2		LINE l+3	FORMAT
1	TIME	16	TIME	31	TIME	46	TIME	I10
2	CODE	17	CODE	32	CODE	47	CODE	I5
3	SENS 1	18	SENS 1	33	SENS 1	48	SENS 1	I8
4	SENS 2	19	SENS 2	34	SENS 2	49	SENS 2	I8
5	SENS 3	20	SENS 3	35	SENS 3	50	SENS 3	I8
6	BKGD 1	21	BKGD 1	36	BKGD 1	51	BKGD 1	I5
7	BKGD 2	22	BKGD 2	37	BKGD 2	52	BKGD 2	I5
8	BKGD 3	23	BKGD 3	38	BKGD 3	53	BKGD 3	I5
9	ERR FLAG	24	ERR FLAG	39	ERR FLAG	54	ERR FLAG	1XØ2X
10	DIG. 9	25	DIG. 41	40	ZERO	55	ZERO	2XØ8
11	DIG. 36	26	ZERO	41	ZERO	56	ZERO	2XØ8
12	DIG. 37	27	ZERO	42	ZERO	57	ZERO	2XØ8
13	WHL. 1	28	WHL. 4	43	WHL. 10	58	WHL. 21	2XØ8
14	WHL. 2	29	WHL. 5	44	WHL. 19	59	WHL. 40	2XØ8
15	WHL. 3	30	WHL. 8	45	WHL. 19	60	ZERO	2XØ8

ABOVE FORMAT REPEATED AS NEEDED TO FILL A ONE-MINUTE PAGE OF OUTPUT.

ROW

PACKING / UNPACKING SCHEMES FOR IPAGE / IPGPKD ARRAYS.

			FORMAT
IPAGE(k)	TIME	1	I10
IPAGE(k+1)	CODE	2	I5
⋮	SENSOR 1	3	I8
	SENSOR 2	4	I8
	SENSOR 3	5	I8
	BACKGROUND 1	6	I5
	BACKGROUND 2	7	I5
	BACKGROUND 3	8	I5
	ERROR WORD	9	Φ2
	DIGITAL DATA	10	Φ8
	DIGITAL DATA	11	Φ8
	DIGITAL DATA	12	Φ8
	WHEEL DATA	13	Φ8
	WHEEL DATA	14	Φ8
IPAGE(k+14)	WHEEL DATA	15	Φ8

...

UNPKIPG SUBROUTINE



PKIPAGE SUBROUTINE

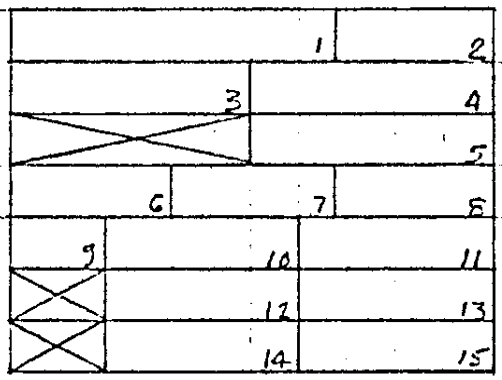

...

RESULTS IN $\frac{7}{15}$ FACTOR OF STORAGE SAVINGS.

ROW

DATA HANDLING

17-BIT S/C WORDS

H.O.	L.O.	
$2^{16}\ 2^{15}\ 2^{14}\ 2^{13}\ 2^{12}\ 2^{11}\ 2^{10}\ 2^{9}$	$2^{8}\ 2^{7}\ 2^{6}\ 2^{5}\ 2^{4}\ 2^{3}\ 2^{2}\ 2^{1}$	2^{0}

ONBOARD S/C (SENSOR)

DATA COMES TO US IN 8-BIT BYTES (BIT 2^0 DROPPED), L.O./H.O BYTES REVERSED AND BIT ORDER REVERSED WITHIN BYTES (DUE TO T/M HANDLING ONBOARD S/C):

L.O.	H.O.
$2^{1}\ 2^{2}\ 2^{3}\ 2^{4}\ 2^{5}\ 2^{6}\ 2^{7}\ 2^{8}$	$2^{9}\ 2^{10}\ 2^{11}\ 2^{12}\ 2^{13}\ 2^{14}\ 2^{15}\ 2^{16}$

AS GIVEN TO US

ΦSΦFPRD PROGRAM REVERSES L.O./H.O. BYTE ORDER (IN DASSMBL):

H.O.	L.O.
$2^{9}\ 2^{10}\ 2^{11}\ 2^{12}\ 2^{13}\ 2^{14}\ 2^{15}\ 2^{16}$	$2^{1}\ 2^{2}\ 2^{3}\ 2^{4}\ 2^{5}\ 2^{6}\ 2^{7}\ 2^{8}$

ΦSΦFPRD PROGRAM REVERSES BIT ORDER VIA KBIT TABLE (IN DASSMBL):

H.O.	L.O.
$2^{16}\ 2^{15}\ 2^{14}\ 2^{13}\ 2^{12}\ 2^{11}\ 2^{10}\ 2^{9}$	$2^{8}\ 2^{7}\ 2^{6}\ 2^{5}\ 2^{4}\ 2^{3}\ 2^{2}\ 2^{1}$

DONE IN ONE STEP

ΦSΦFPRD PROGRAM MULTIPLIES BY TWO (LS2) TO CORRECT FOR BIT 2^0 BEING DROPPED (IN DASSMBL) TO RECONSTRUCT ORIGINAL S/C WORD WITH UNCERTAINTY ONLY IN BIT 2^0:

H.O.	L.O.	
$2^{16}\ 2^{15}\ 2^{14}\ 2^{13}\ 2^{12}\ 2^{11}\ 2^{10}\ 2^{9}$	$2^{8}\ 2^{7}\ 2^{6}\ 2^{5}\ 2^{4}\ 2^{3}\ 2^{2}\ 2^{1}$	2^{0}

9/3/70

9-BIT S/C WORDS



ONBOARD S/C (BACKGROUND)

DATA COMES TO US IN 8-BIT BYTE (BIT 2^0 DROPPED) AND BIT ORDER REVERSED (DUE TO T/M HANDLING ONBOARD S/C):



AS GIVEN TO US

ØSØFPRD PROGRAM REVERSES BIT ORDER VIA KBIT TABLE (IN DASSMBL):



ØSØFPRD PROGRAM MULTIPLIES BY TWO (LS2) TO CORRECT FOR BIT 2^0 BEING DROPPED (IN DASSMBL) TO RECONSTRUCT ORIGINAL S/C WORD WITH UNCERTAINTY ONLY IN BIT 2^0:

DONE IN ONE STE



9/2/70
ROW

69-806A-08A

MONITORING OF SOLAR FAR ULTRAVIOLET RADIATION

FROM THE OSO-5 SATELLITE

William A. Rense and Robert Parker
Laboratory for Atmospheric and Space Physics
University of Colorado
Boulder, Colorado 80302

September 1972

Final Report for Period June 1964 - September 1972

Prepared for

GODDARD SPACE FLIGHT CENTER

Greenbelt, Maryland 20771

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.
Final Report		

4. Title and Subtitle	5. Report Date
Monitoring of Solar Far Ultraviolet Radiation from the OSO-5 Satellite	September, 1972
	6. Performing Organization Code
7. Author(s) William A. Rense and Robert Parker	8. Performing Organization Report No.
9. Performing Organization Name and Address Laboratory for Atmospheric and Space Physics University of Colorado Boulder, Colorado 80302	10. Work Unit No.
	11. Contract or Grant No. NAS 5-3931
12. Sponsoring Agency Name and Address Goddard Space Flight Center Greenbelt, Maryland 20771	13. Type of Report and Period Covered Final Report, June, 1964 - Sept. 1972
	14. Sponsoring Agency Code

15. Supplementary Notes

16. Abstract

A spectrophotometer for monitoring the solar EUV in three broad wavelength bands is described. The kind of data obtained, along with sources of error, are presented. The content of the tape library which contains the data is outlined. The scientific results are discussed. These include: solar flares in the EUV, solar eclipse observations in the EUV, SFD's and relationship to solar flares, and the application of satellite sunrise and sunset data for the study of model upper atmospheres for the earth.

17. Key Words (Selected by Author(s))	18. Distribution Statement
Solar ultraviolet radiation; Solar flares; Solar activity; Composition of earth's upper atmosphere	

19. Security Classif. (of this report)	20. Security Classif. (of this page)	21. No. of Pages	22. Price*
Unclassified	Unclassified	38	

*For sale by the Clearinghouse for Federal Scientific and Technical Information, Springfield, Virginia 22151.

Preface

The main objective of the work was to monitor the solar EUV from a wheel instrument on OSO-5. The instrument as finally designed, constructed, and calibrated, was a spectrophotometer utilizing a concave grating and three photomultiplier tubes. The latter detected radiation in three broad wavelength channels, respectively: 1) 280-370 Å, 2) 465-630 Å, and 3) 760-1030 Å. The pulses due to the EUV photons striking the photomultipliers were amplified, shaped and counted. Detection occurred for 30 milliseconds during each revolution of the wheel. The spectrophotometer was turned on for several orbits each day, and obtained usable data from launch (January 21, 1969) through June 1971.

Data were obtained for three large solar flares (March 12, 21 and April 21, 1969). The variation of EUV intensity with time was quite similar for all three bands, and, for the April 21 flare, for which hard X-ray data were available, resembled closely the time variation of the latter. Impulsive peaks were observed for all three bands, superimposed on a rapid rise to maximum and slow decline. Band 3, the one containing photons of highest energy, showed much less tendency for exhibiting these impulsive components. A model of a large flare is proposed based on the OSO-5 EUV data and the concept of twisted magnetic fields around sunspot groups brought on by differential rotation of the sun.

Observations of a partial solar eclipse in the three EUV bands gave some information on the brightness of active areas in EUV, and on the presence or absence of limb-brightening.

Data on the time variation of EUV intensity during sunrise or sunset, for each wavelength band, were compared with the variation predicted from the prevailing CIRA 1965 model atmosphere. For sunset, the predicted curves could be brought into agreement with the observations of all three bands by a modification of the CIRA atmosphere involving a lowering of atomic oxygen density and an increase of molecular nitrogen density.

Contents

		Page
I.	OBJECTIVE	1
II.	INTRODUCTION	2
III.	INSTRUMENTATION	3
	A. Structural features	3
	B. Optics	3
	C. Detection	6
	D. Calibration	7
IV.	DATA REDUCTION	11
	A. Data sequence	11
	B. Data library	11
	C. Data presentation and error analysis	12
V.	SCIENCE	16
	A. Scope of science analysis	16
	B. Solar flares in the EUV	16
	C. Solar eclipse observations	22
	D. Sunrise and sunset data	22
REFERENCES		25
ACKNOWLEDGEMENTS		26

Illustrations

Figure		Page
1	Photograph of Spectrophotometer	4
2	Optical Layout of Spectrophotometer	5
3	The Calibration System	8
4	Sample Data, EUV vs. Time	13
5	Solar Flare of March 12, 1969	17
6	Solar Flare of March 21, 1969	18
7	Solar Flare of April 21, 1969	19
8	EUV Intensity Variations at Sunset	23

I. Objective

The objective of the work of this contract was to a) design, construct and calibrate a spectrophotometer for monitoring the EUV radiation from the sun in three broad bands, b) obtain data with the spectrophotometer from the wheel of the OSO-5 satellite and reduce this data to convenient form, and c) analyze some of the more important data to obtain scientific information about the sun and the earth's upper atmosphere.

II. Introduction

The design of the spectrophotometer for accomplishing the above objectives began in 1964 under contract NAS 5-3931 (June 25, 1964). The choice of the three broad bands to be monitored in the solar EUV was made on the basis of their usefulness as a means of obtaining information on the densities of air at higher levels in the earth's atmosphere and their importance in helping to understand such solar phenomena as flares, enhanced emission from active areas, and long range time variation of solar EUV. Some thought was given to the possibility of designing the spectrophotometer for monitoring only some of the brighter EUV lines in the solar spectrum, but the decision to monitor the bands instead was made on the basis of 1) greater reliability of the instrument and associated electronics because of the higher intensity of the radiation and 2) need at the time for examining solar intensity variation for the entire EUV. Although the three broad bands finally chosen did not cover the entire EUV, they did represent most of the EUV radiant energy below 1030 Å. These bands are: channel 1: 280-370 Å; channel 2: 465-630 Å; and channel 3: 760-1030 Å. Channel 1 contains strong emission lines such as He II (304 Å), Mg IX (368 Å), Fe XVI (335 Å) and Fe XV (284 Å). Channel 2 includes such lines as He I (584 Å); O V (630 Å); Mg X (625 Å and 610 Å); Si XII (500 Å), Ne VII (465 Å) and He I continuum. Channel 3 contains the hydrogen Lyman continuum, the hydrogen Lyman series lines from Lyman beta (1026 Å) to shorter wavelengths, C III (977 Å), O III and O II (834 Å), O IV (790 Å) and Ne VIII (770 Å).

The instrument itself, to assure sufficient speed in the far EUV, was chosen to be a grating spectrophotometer of the grazing-incidence (Rowland circle mount) type. The detection of the EUV was to be made with photomultipliers, one for each wavelength band. The photomultiplier bursts, produced by EUV photons, were to be electronically counted in a suitable way. Radiation from the entire solar disc was to be allowed to enter the spectrophotometer aperture for each revolution of the OSO satellite wheel.

III. Instrumentation

A. Structural Features

The spectrophotometer has the appearance of a truncated, pie-shaped unit made of an aluminum sandwich structure. (Fig. 1). The main spacecraft connector and its cable are mounted on the back wall of the instrument. The back wall and the top are perforated with a pattern of small holes which serve to outgas the instrument in flight. The bottom side of the instrument is made of 1/2 inch aluminum plate containing threaded holes for fastening the instrument to the deck of the spacecraft. The two side walls are made of relatively thin, reinforced aluminum sheet. The front face has a highly reflective surface finish to thermally decouple the instrument from the front panel of the spacecraft. All other exterior surfaces are blackened for efficient radiative coupling to the inner walls of the spacecraft compartment.

The interior of the instrument contains the optical parts and the detection system with associated electronic components.

B. Optics

The optical layout of the spectrophotometer is shown in Figure 2. Light from the entire solar disk enters the slit A and, at a grazing angle of 80°, strikes the concave, 20 cm radius, 1200 line/mm grating G where the EUV in the three wavelength bands are diffracted and brought to focus along the Rowland circle. Three Bendix M 306 resistant strip photomultipliers (1,2,3) receive the three first-order bands, respectively. The EUV which is detected by photomultiplier 2 is first reflected by the mirror M, but the other two beams pass through apertures in the Rowland circle before striking the tube cathodes. Light at the central image is trapped at C. The apertures restrict the geometrical size of each beam, and limit the wavelengths in the bands. The latter limits are: 280-370 Å (Channel 1), 465-630 Å (Channel 2), and 760-1030 Å (Channel 3).

Channel 1 in practice was free of overlapping spectral orders because of of the insensitivity of the spectrophotometer for wavelengths less than about 280 Å. Channels 2 and 3, however, include higher order wavelength radiation

Figure 1.

Photograph of Spectrophotometer

Figure 2.

Optical Layout of Spectrophotometer

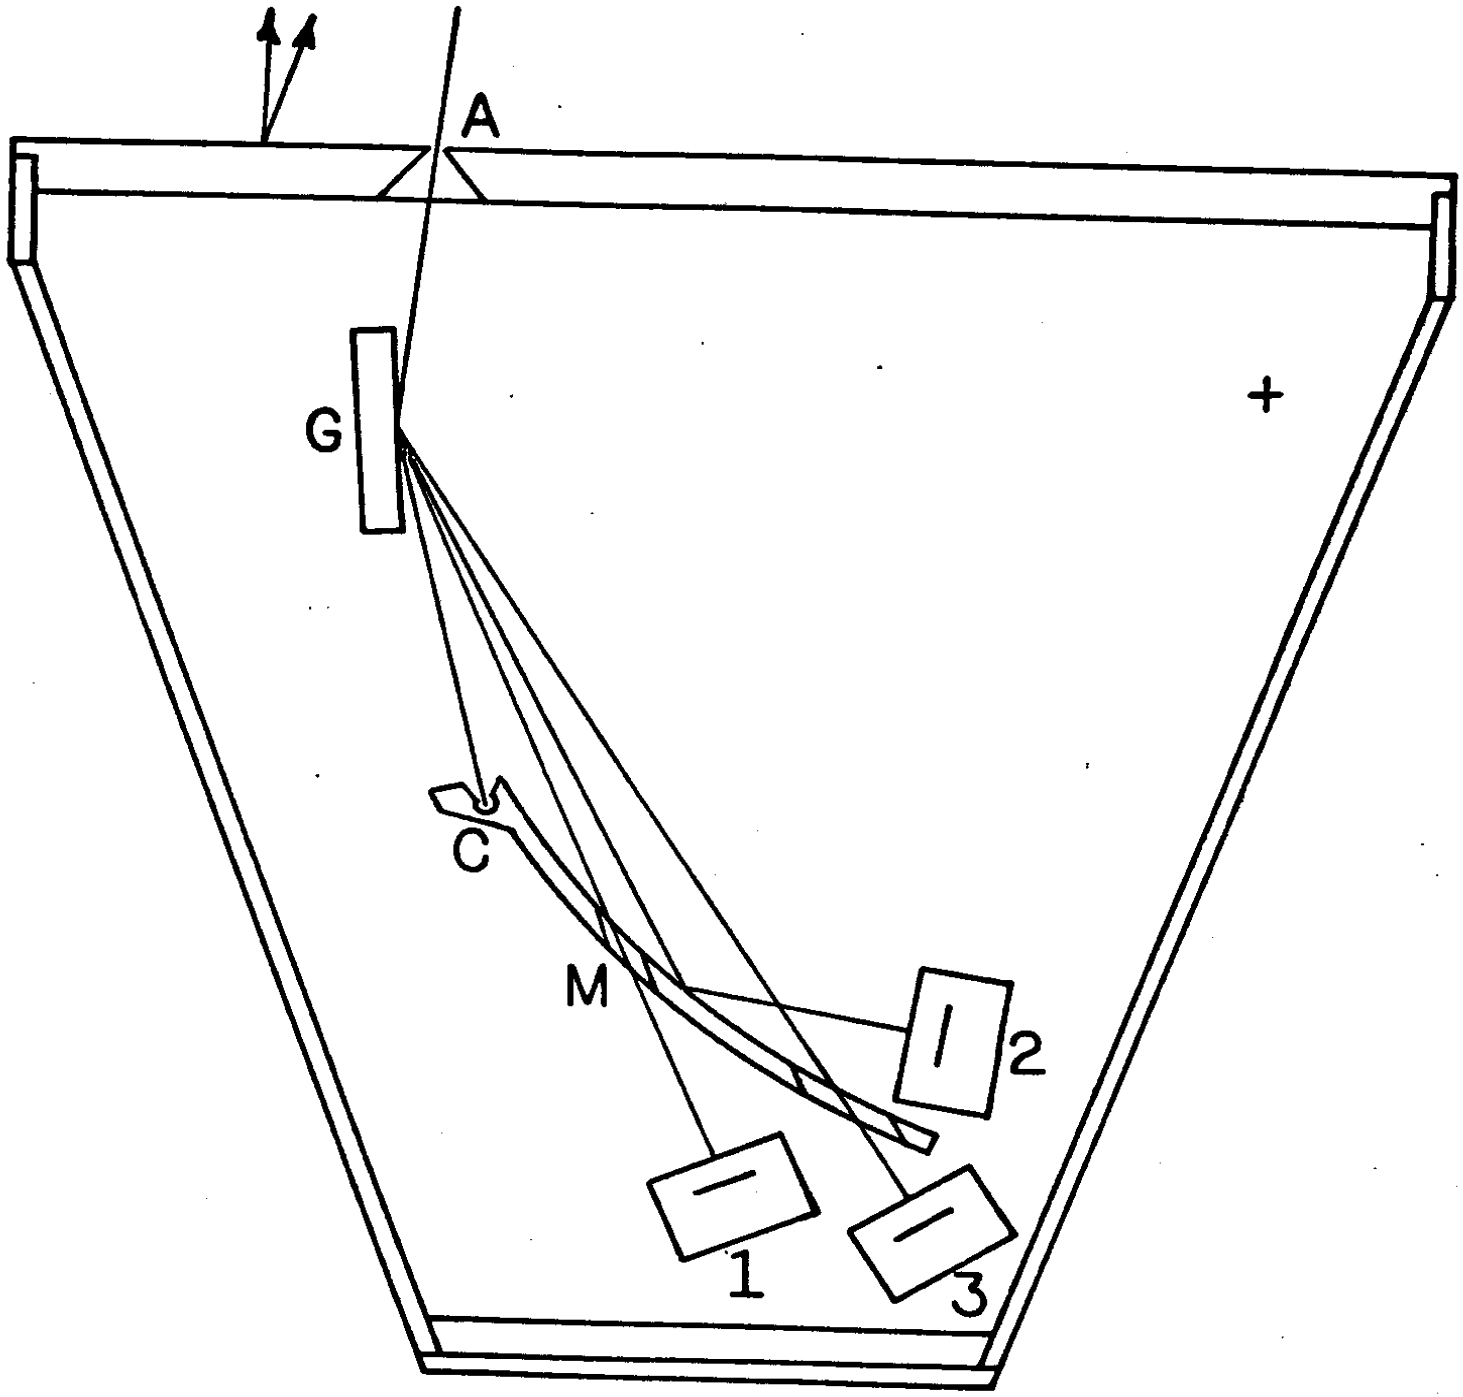
A
G
+
C
M
2
1
3

outside their proper ranges; these effects had to be allowed for by the calibration process.

C. Detection

Three Bendix M 306 resistance strip photomultipliers are the basic detectors, one for each EUV wavelength band (or channel). The pulse signals from these photomultipliers are amplified and then shaped. The shaped pulses are sent through electronic gates to a combination of three binary counters and shift registers where they are stored. Counting takes place only when the electronic gate is open. The gate is opened when the sun activates an indexed solar eye unit which is fixed on the outboard wall of the instrument. During this interval (two are possible: 30 millisec or 10 millisec) the sun is illuminating the spectrophotometer grating. After the gate closes, stored counts for each channel are read out to the telemetry and the counters reset to zero. The count range is from 100 to 20,000. The trigger eye optics consists of a cylindrical lens, two glass filters and two photo-resistive diodes. Following read-in, there is a delay ranging from 120 to 310 milliseconds while the commutator is synchronized with the digital telemetry system. One read-out gate is used to acquire synchronization.

For read-out of solar data a sequence of 10 mainframe words is necessary. The first data word is a code word consisting of eight binary "ones." Words 2 and 3 contain the 16 bit binary number stored in the counter for channel 1. The number is read out starting with the least significant bit and proceeding, in sequence, to the most significant bit. Words 4 and 5 contain the intensity data from channel 2; words 6 and 7, from channel 3. Words 8, 9 and 10 contain the eight least significant bits from the background readings of the three channels, respectively. Zeros are now presented to the telemetry system until the next read-in has been completed. When the instrument is calibrated, the read-out sequence is the same as that above, except that the code word now consists of a binary "zero" followed by seven binary "ones." Data read-out is on Main Frame data words 15 and 27.

Five housekeeping channels are used. Analog subcom channels 1, 2, and 3 monitor a voltage proportional to the low voltage supplied to each of the

three detector high voltage supplies in data channels 1, 2, and 3 respectively. Housekeeping channels 4 and 5 monitor temperature probes; the first probe is in the vicinity of the electronics, the second, near the photomultipliers. The analog subcom is read out on Main Frame data word 25.

The command allocation is as follows:

Command No.	Function	Code Format
19	Turns on equipment	0414
11	All high voltage off	0305
113	Channel 2 H.V. on	0309
114	Channel 3 H.V. on	0310
215	Channel 1 H.V. on	0312
202	Calibrate - 4 per hour	0107
229	Calibrate - 1 per hour (30 ms)	0609
132	Calibrate - 1 per hour (10 ms)	0701

D. Calibration

The purpose of the calibration of the spectrophotometer was to provide a means of converting the output of a given channel in terms of counts to an output in terms of absolute intensity of the EUV solar radiation associated with that channel (that is, one of the three wavelength bands).

The vacuum system for calibration (Figure 3) consisted of three separate chambers connected by 6" gate valves: 1) the main chamber which holds the instrument positioned on a rotating table to simulate the rotation of the satellite, 2) the monochromator chamber containing the high voltage capillary discharge source, and 3) the grating chamber. The gases used in the capillary discharge source were hydrogen, helium, argon and xenon in order to provide a range of appropriate wavelengths. A three-stage differential pumping system was required to assure the necessary degree of vacuum in the main chamber. The

Figure 3.

The Calibration System

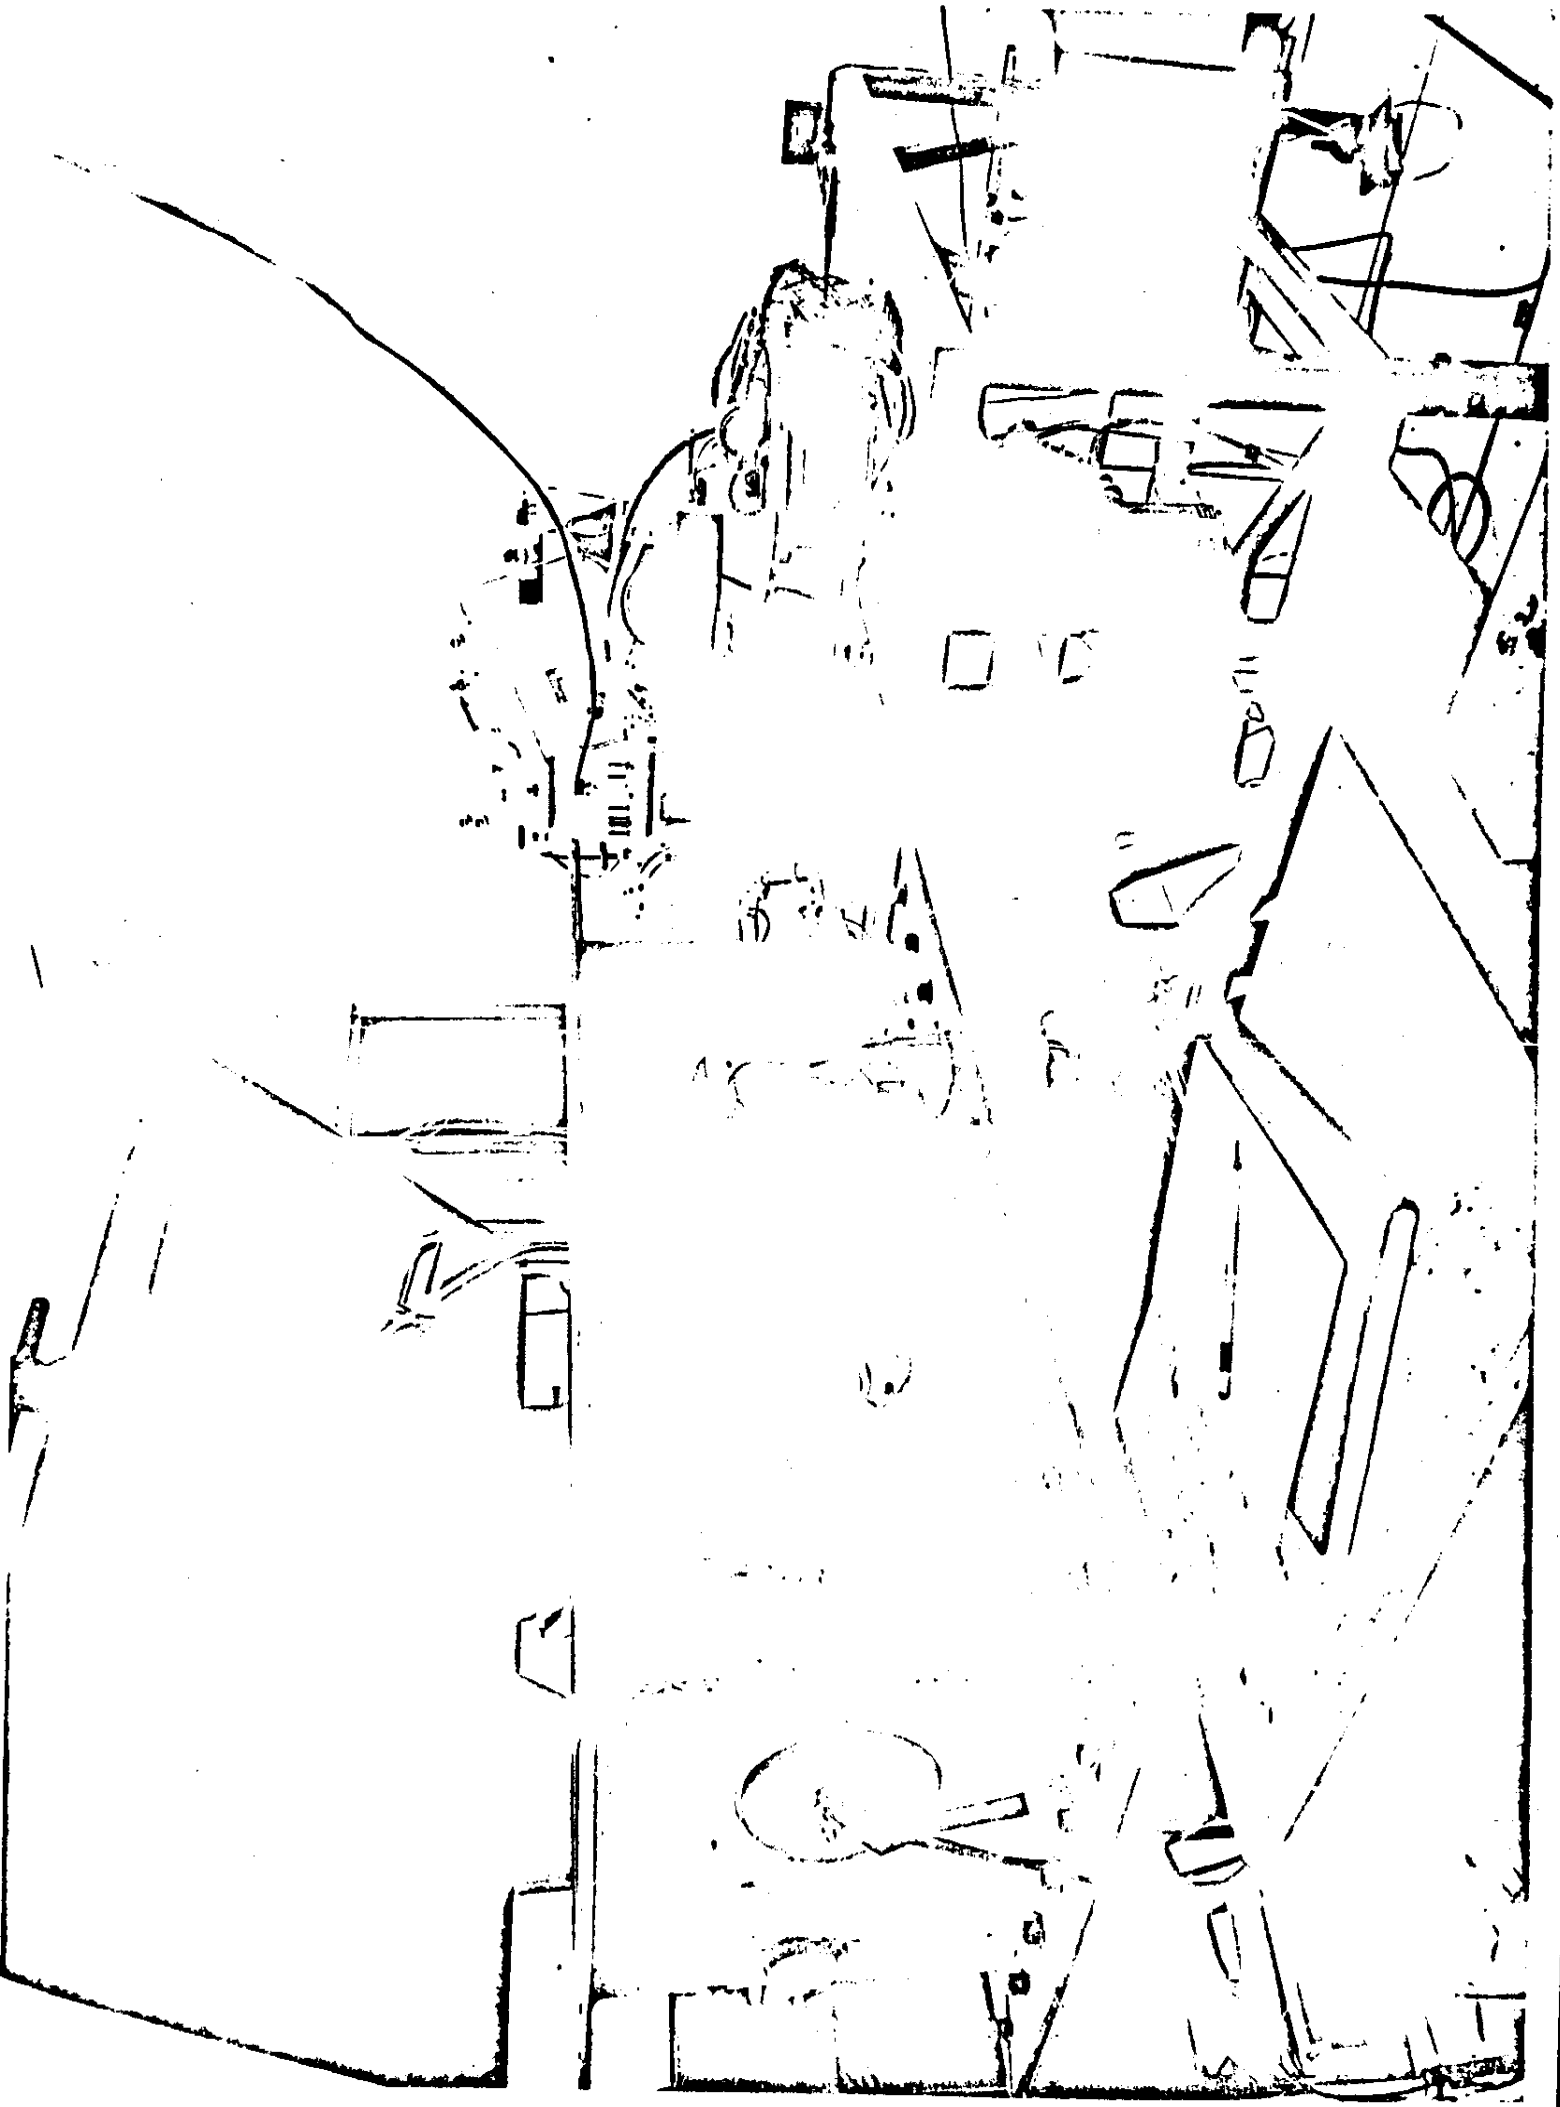

concave grating, serving as the dispersing element, may be rotated so as to select the wavelength falling on the instrument. A series of apertures collimates the light from the source before the light reaches the grating, so that, as viewed from the instrument, the monochromatic beam from the grating corresponds to a source that subtends an angle of 32'. The grating can be replaced by a suitable concave mirror when "white" light is desired. Detection was accomplished by means of a flow-through ion chamber; the current produced by the ionization of the gas in the latter chamber was measured and the absolute intensity of EUV radiation energetic enough to ionize the given gas was computed. A photomultiplier detector at the end of the ion chamber enabled the experimentor to determine when all the EUV radiation passing through the chamber was absorbed in the chamber.

The calibration set-up described above gave sufficient flexibility in wavelength band selection to determine the constants required to convert counts from each wavelength channel of the satellite spectrometer detection system into absolute intensity of the EUV radiation (for that channel) striking the optical aperture of the spectrometer. Nine constants are required as outlined below.

To allow for first order and overlapping order effects, the number of counts S_i' of channel i can be represented by:

$$S_i' = K_{i1} I_1 + K_{i2} I_2 + K_{i3} I_3$$

where I_1, I_2 and I_3 are the actual intensities of the radiation in the three channels, incident on the spectrometer, and K_{i1}, K_{i2}, K_{i3} are constants which are determined by the calibration procedure. The matrix equation:

$$(S') = (K)\ (I)$$

may be inverted to obtain (I):

$$I = (K)^{-1}\ (S')$$

The values of the constants (K's) as determined in the laboratory when used for the actual solar observations from the satellite did not yield realistic values for the intensities of channel 2 and channel 3 but the results for channel 1 were

in good agreement with measurements made by other observers. Accordingly, for convenience in interpreting data, the K's were altered so that reduction to absolute intensities was made to conform to the Hinteregger's values:

$$I_1 = 8.99 \times 10^9 \text{ photons/cm}^2\text{/sec}$$

$$I_2 = 4.40 \times 10^9 \text{ photons/cm}^2\text{/sec}$$

$$I_3 = 20.4 \times 10^9 \text{ photons/cm}^2\text{/sec}$$

The matrix used in such reduction is:

$$\begin{bmatrix} S'_1 \\ S'_2 \\ S'_3 \end{bmatrix} = \begin{bmatrix} 4.31 & 0 & 0 \\ 3.66 & 11.2 & 0 \\ 0.371 & 0.372 & 1.88 \end{bmatrix} \times 10^{-7} \begin{bmatrix} I_1 \\ I_2 \\ I_3 \end{bmatrix}$$

Before applying the above matrix to compute absolute values, the actual observed counts, S, were corrected to obtain S'. The correction involved two steps: first, the elimination of scattered light, and second, the allowance for degradation since launch time. The scattered light, mostly the 1216 Å radiation of the solar hydrogen Lyman alpha line, was measured by observing the sunrise data of each channel. The degradation correction was made by empirically fitting a suitable analytic expression for each channel to the observed curves: average count at spacecraft noon versus time. A source of error which could not be systematically accounted for was pitch of the spacecraft.

In order to have an in-flight check on the performance of the spectrophotometer, a calibration lamp was included in the instrument. The lamp was a sapphire-windowed glass capillary tube containing Xenon gas and operated by a high voltage supply. The ultraviolet radiation emitted falls on the cathodes of the three photomultipliers and produces an output in the form of counts. Changes with time in the sensitivity of the cathodes or in the response of the electronic components associated with the amplification of signal and the subsequent counting system could be monitored in this way. The detection system can be checked by exciting the lamp every 256 or 1024 revolutions of the wheel (determined by command).

IV. Data Reduction

A. Data Sequence

Counts for each channel are obtained for 30 milliseconds when the sun is in the field of view. The counters are then read out to the telemetry and reset to zero. A background count (usually zero) is then made with the sun out of the field of view and the counters again read out to telemetry. The cycle is then completed until initiated by the next pulse from the monitoring eye.

For a few weeks after launch, data from the calibration lamp in the form of counts were obtained every 1024 revolutions of the wheel. Because of a malfunction, these data were discontinued. Later (May 1969) another malfunction in the calibration unit required that the data henceforth be activated by command.

One orbit storage on s/c tape recorders is made for playback to ground stations. For each channel the solar data appear as two 8-bit binary words serially each revolution of the wheel.

In general, to prolong the period of data-taking despite degradation, data are acquired for three consecutive orbits out of every fifteen per day. Useful data have been collected for the period January 23, 1969 to July 19, 1971, spanning about 14,000 orbits of the satellite. This date was chosen because by that time the degradation of the instrument response for EUV wavelength bands 1 and 2 was quite advanced, and that of band 3 moderately advanced. The noise effects were not reduced proportionately, so that measurements during flares, satellite sunrises, and satellite sunsets were not of sufficient quality to justify further reduction of data.

B. Data Library

The tape library of data acquired for the period January 23, 1969 to July 19, 1971 consists of the following:

1. 1068 quicklook tapes
2. 191 correlated data tapes
3. 178 main frame data tapes
4. 46 command history tapes
5. 137 merged data tapes

6. 28 final merged data tapes

7. 289 scratch tapes

8. 1 tape of condensed data from 13,000 orbits

The printed output library consists of:

1. 14 binders containing label information from direct output of the OSO-5 program (1,000 orbits or CDT files per binder)
2. 2 binders containing selected information on each orbit
3. 2 binders of label information, via the merged program, for each re-formatted file on the merged data tapes
4. 1 binder containing the above three items of information for data of poorer quality which was not placed on the final merged data tapes
5. 1 binder containing printout of the punched output from the OSO-5 program
6. 1 binder containing output of the catalog program which shows orbit number vs. file number for the correlated data tapes
7. 1 binder containing computer program listings for all the auxillary programs as well as main programs for OSO-5

In addition there are 13 boxes of punched output from the OSO-5 program containing condensed data for about 1,000 orbits, and 6 boxes of OSO-5 main and auxillary program decks. A 500 page volume includes the documentation of all OSO-5 computer programs which were written for the handling and analysis of all the data.

C. Data Presentation and Error Analysis

A graph of observed noon-day counts vs. orbit number for all three channels is shown in the lower graph of Figure 4. From top to bottom, the sets of points refer, respectively, to channels 3, 1, 2. Many of the irregularities in these curves are not real. The gradual degradation of each channel is quite apparent, as are the breaks where no data were obtained (instrument off). All of the data counts were acquired in a 30 millisec interval. Other variations in the curves may be attributed to 1) pitch of the satellite, 2) interaction of raster

Figure 4.

Sample Data, EUV vs. Time

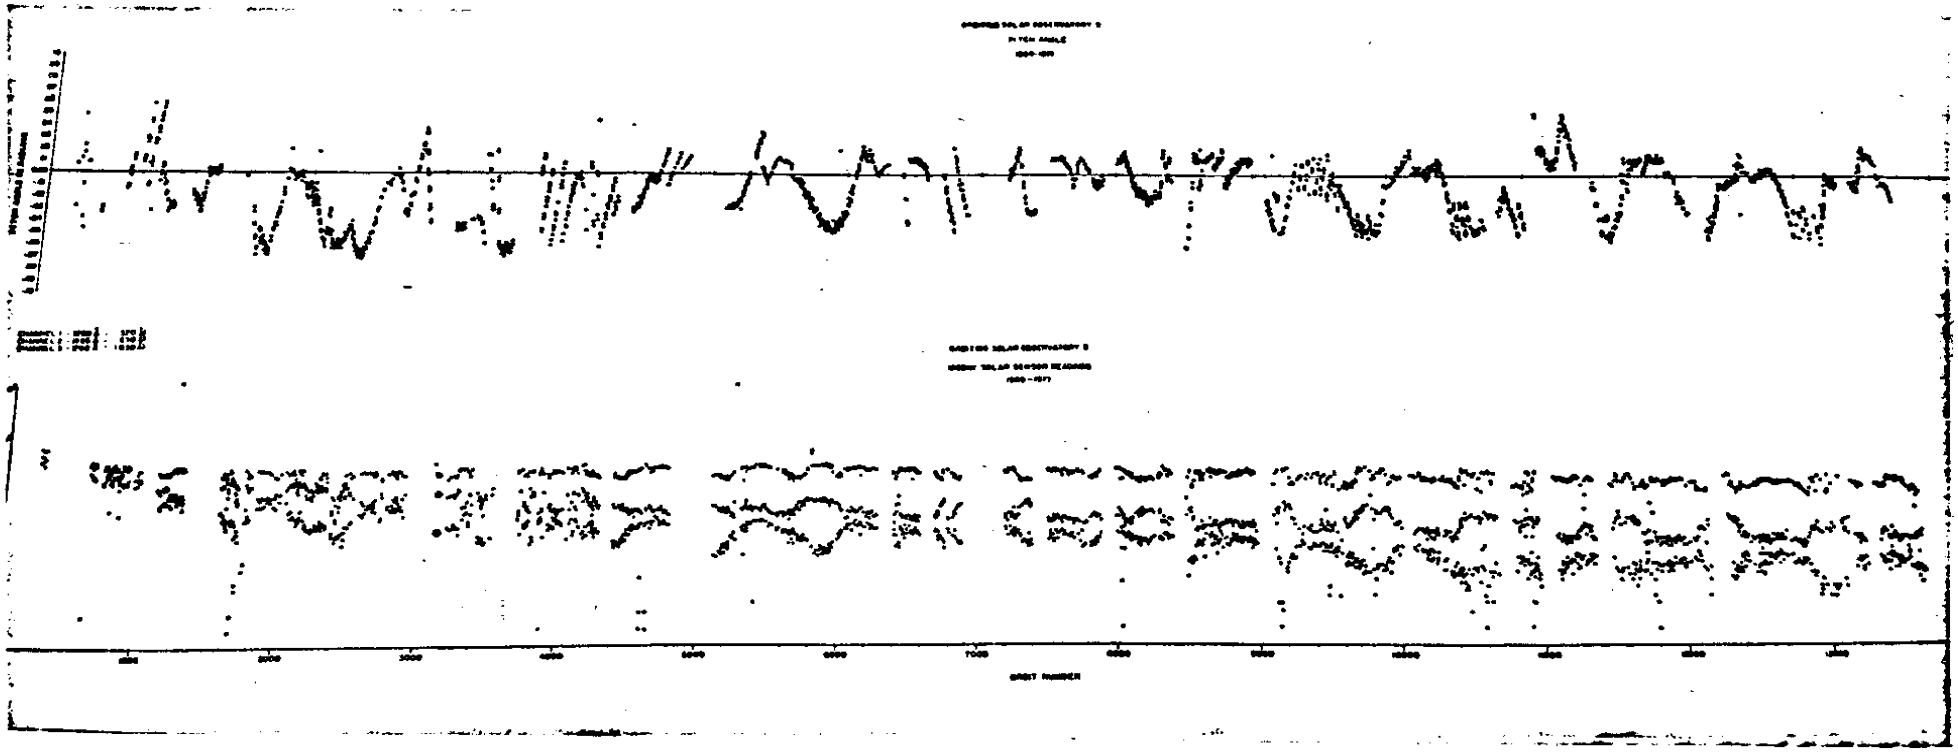

scanning of the pointed instruments on the satellite, 3) intrinsic variation in instrument response, 4) actual variations in the solar EUV intensity for each channel. Each of these will be considered.

A graph of the monitored values of satellite pitch at noon vs. orbit number is shown in the upper graph of Figure 4. This curve does not show short period pitch changes which sometimes also occurred. An effort to find a systematic quantitative relationship between the curves in Figure 4 was unsuccessful. In general, channel 1 intensity increases for large negative pitch, and that for channel 2 decreases. A change in pitch would cause the solar light to sweep through the instrument aperture at a slightly different angle. Because of the presence of baffles in the optical paths of the three channels, pitch changes could cause variations in the amount of EUV striking the photo tubes. Moreover, if the reflectivity of the grating changed over the area of the grating, and if the photocathode surfaces of the photomultipliers were not uniformly sensitive, pitch effects would be present. For analysis of data for a particular orbit, or fraction of an orbit, pitch changes were normally negligible, and do not alter the observed values of, at least, relative intensity vs. time.

When raster scanning of the pointed instruments on the satellite occurs, the EUV counts from the photomultipliers oscillate in a somewhat regular manner. The effect is only occasionally present and can easily be recognized. It may be nearly completely eliminated by a suitable averaging of intensities over several adjacent points. However, time resolution of the measurements may be reduced when such averaging is required.

An apparently random variation of intensity from point to point is present in each channel. It is least for channel 3. No explanation for this irregularity in response could be found, but it appears to be instrumental. When adjacent intensity points over several consecutive revolutions of the wheel are averaged, a regular variation is observed of period approximately 5 minutes. It is believed that this effect is either instrumental or associated with the satellite environment. A gradual decline in average intensity of the EUV is observed in all cases during the daytime interval after satellite sunrise and before satellite sunset. Again, this effect is believed to be instrumental and is probably the result of

temperature changes. It may also reflect a temporary loss in sensitivity of the photomultipliers over the time of continuous diurnal exposure.

Changes in intensity other than those mentioned above are assumed to be real variations in solar EUV radiation. An example is that of a solar flare. For such variations, after a suitable averaging procedure, relative intensities are normally estimated to be accurate to 2% with a time resolution of about 4 seconds.

V. Science

A. Scope of Science Analysis

Four scientific projects were undertaken and completed in the analysis of the reduced solar EUV data. These are 1) study of large flares, 2) interpretation of solar eclipse EUV data of March 7, 1970, 3) study of relationship between solar EUV flare intensities and sudden frequency disturbances (SFD's), 4) analysis of sunrise and sunset absorption data for comparison with predicted absorption of CIRA model atmospheres for the earth.

The detailed results of the above projects are contained in the papers:

1. "Solar Flares in the EUV Observed from OSO-5," by P. T. Kelly and W. A. Rense, to be published in Solar Physics, September or October, 1972 issue.
2. "Observations of March 7, 1970 Solar Eclipse from OSO-5 in Far UV," by R. Parker and W. A. Rense, Report UAG-2, Part III, (World Data Center A, Upper Atmosphere Geophysics), April, 1971, p. 417.
3. "SFD's for Three Large Solar Flares," by F. Solheim. Thesis in progress for Ph.D. degree, University of Colorado, 1972.
4. "Broad Band Solar EUV Absorption in Upper Atmosphere," by K. Allen and W. A. Rense (to be submitted for publication).

Only a brief summary of some of the results of the above papers will be given here.

B. Solar Flares in the EUV

Solar flares in the three EUV channels were observed for flares of brightness 1B, 2B and 3B. Figures 5, 6 and 7 show the variation of EUV intensity with time for each of the channels for the large flares of March 12, March 21, and April 21, 1969. In general, the time dependence of flare intensity in each band is characterized by a more or less slowly varying component with one or more impulsive bursts superimposed. Channel 2 (465-630 Å) and channel 3 (760-1030 Å) are quite similar in their time variations, but channel 1 (280-370 Å) shows less or no impulsive structure, and declines more slowly. The total time-integrated absolute flare energies for the three channels, 1, 2, and 3, are, respectively, (in units of ergs): March 12, 1.0×10^{29}, 1.4×10^{29}, and $1.3 \times$

Figure 5.

Solar Flare of March 12, 1969

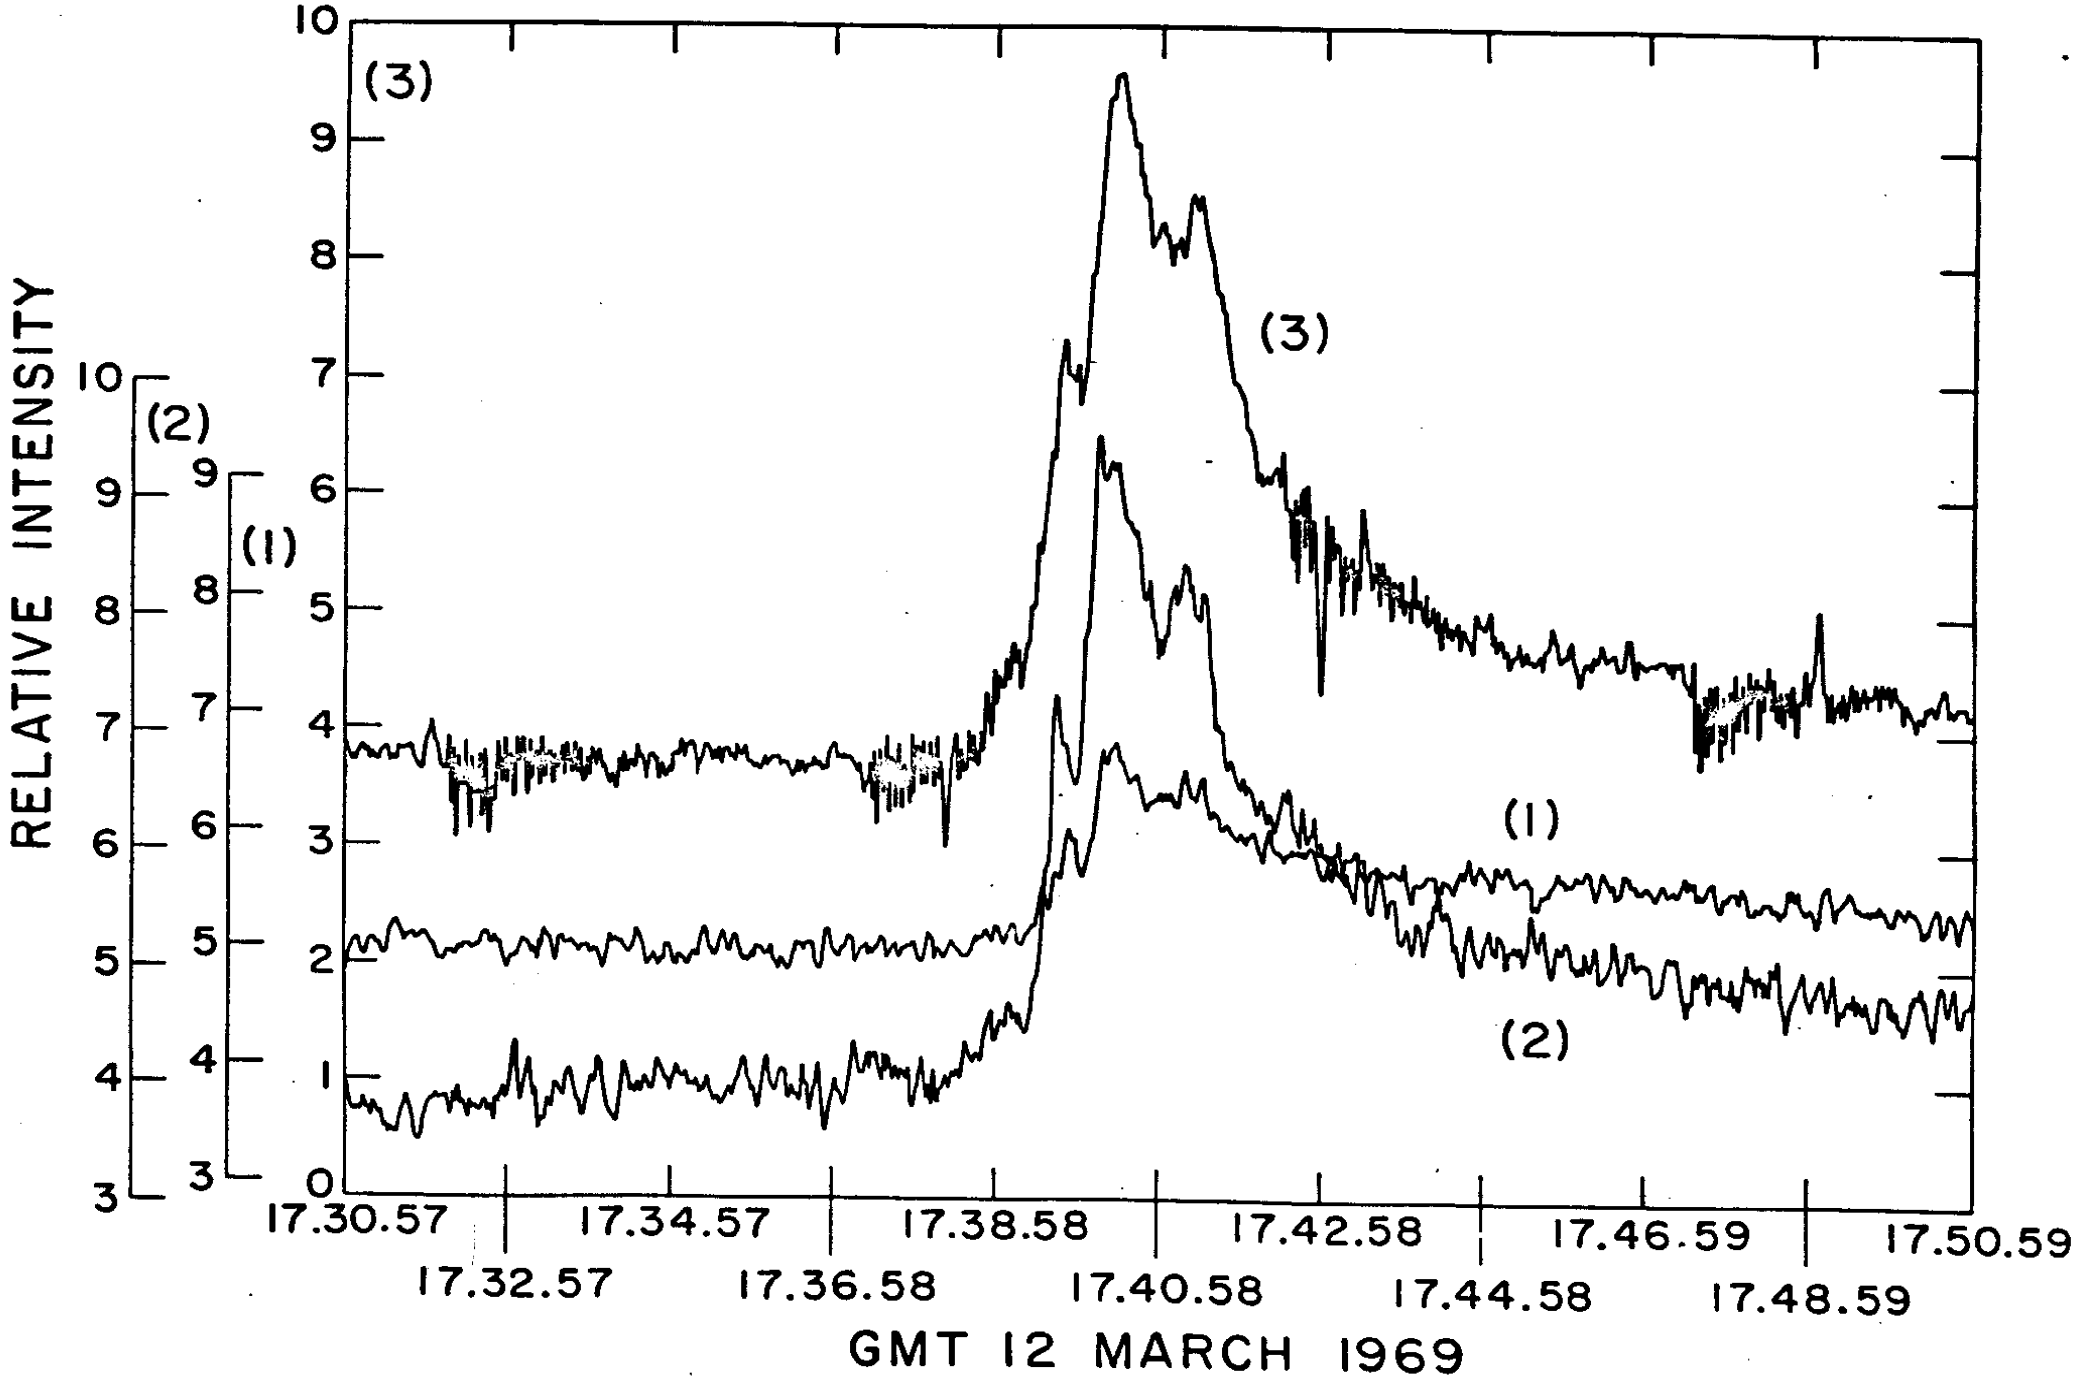
RELATIVE INTENSITY
(1)
(2)
(3)
17.30.57
17.32.57
17.34.57
17.36.58
17.38.58
17.40.58
17.42.58
17.44.58
17.46.59
17.48.59
17.50.59
GMT 12 MARCH 1969

Figure 6.

Solar Flare of March 21, 1969

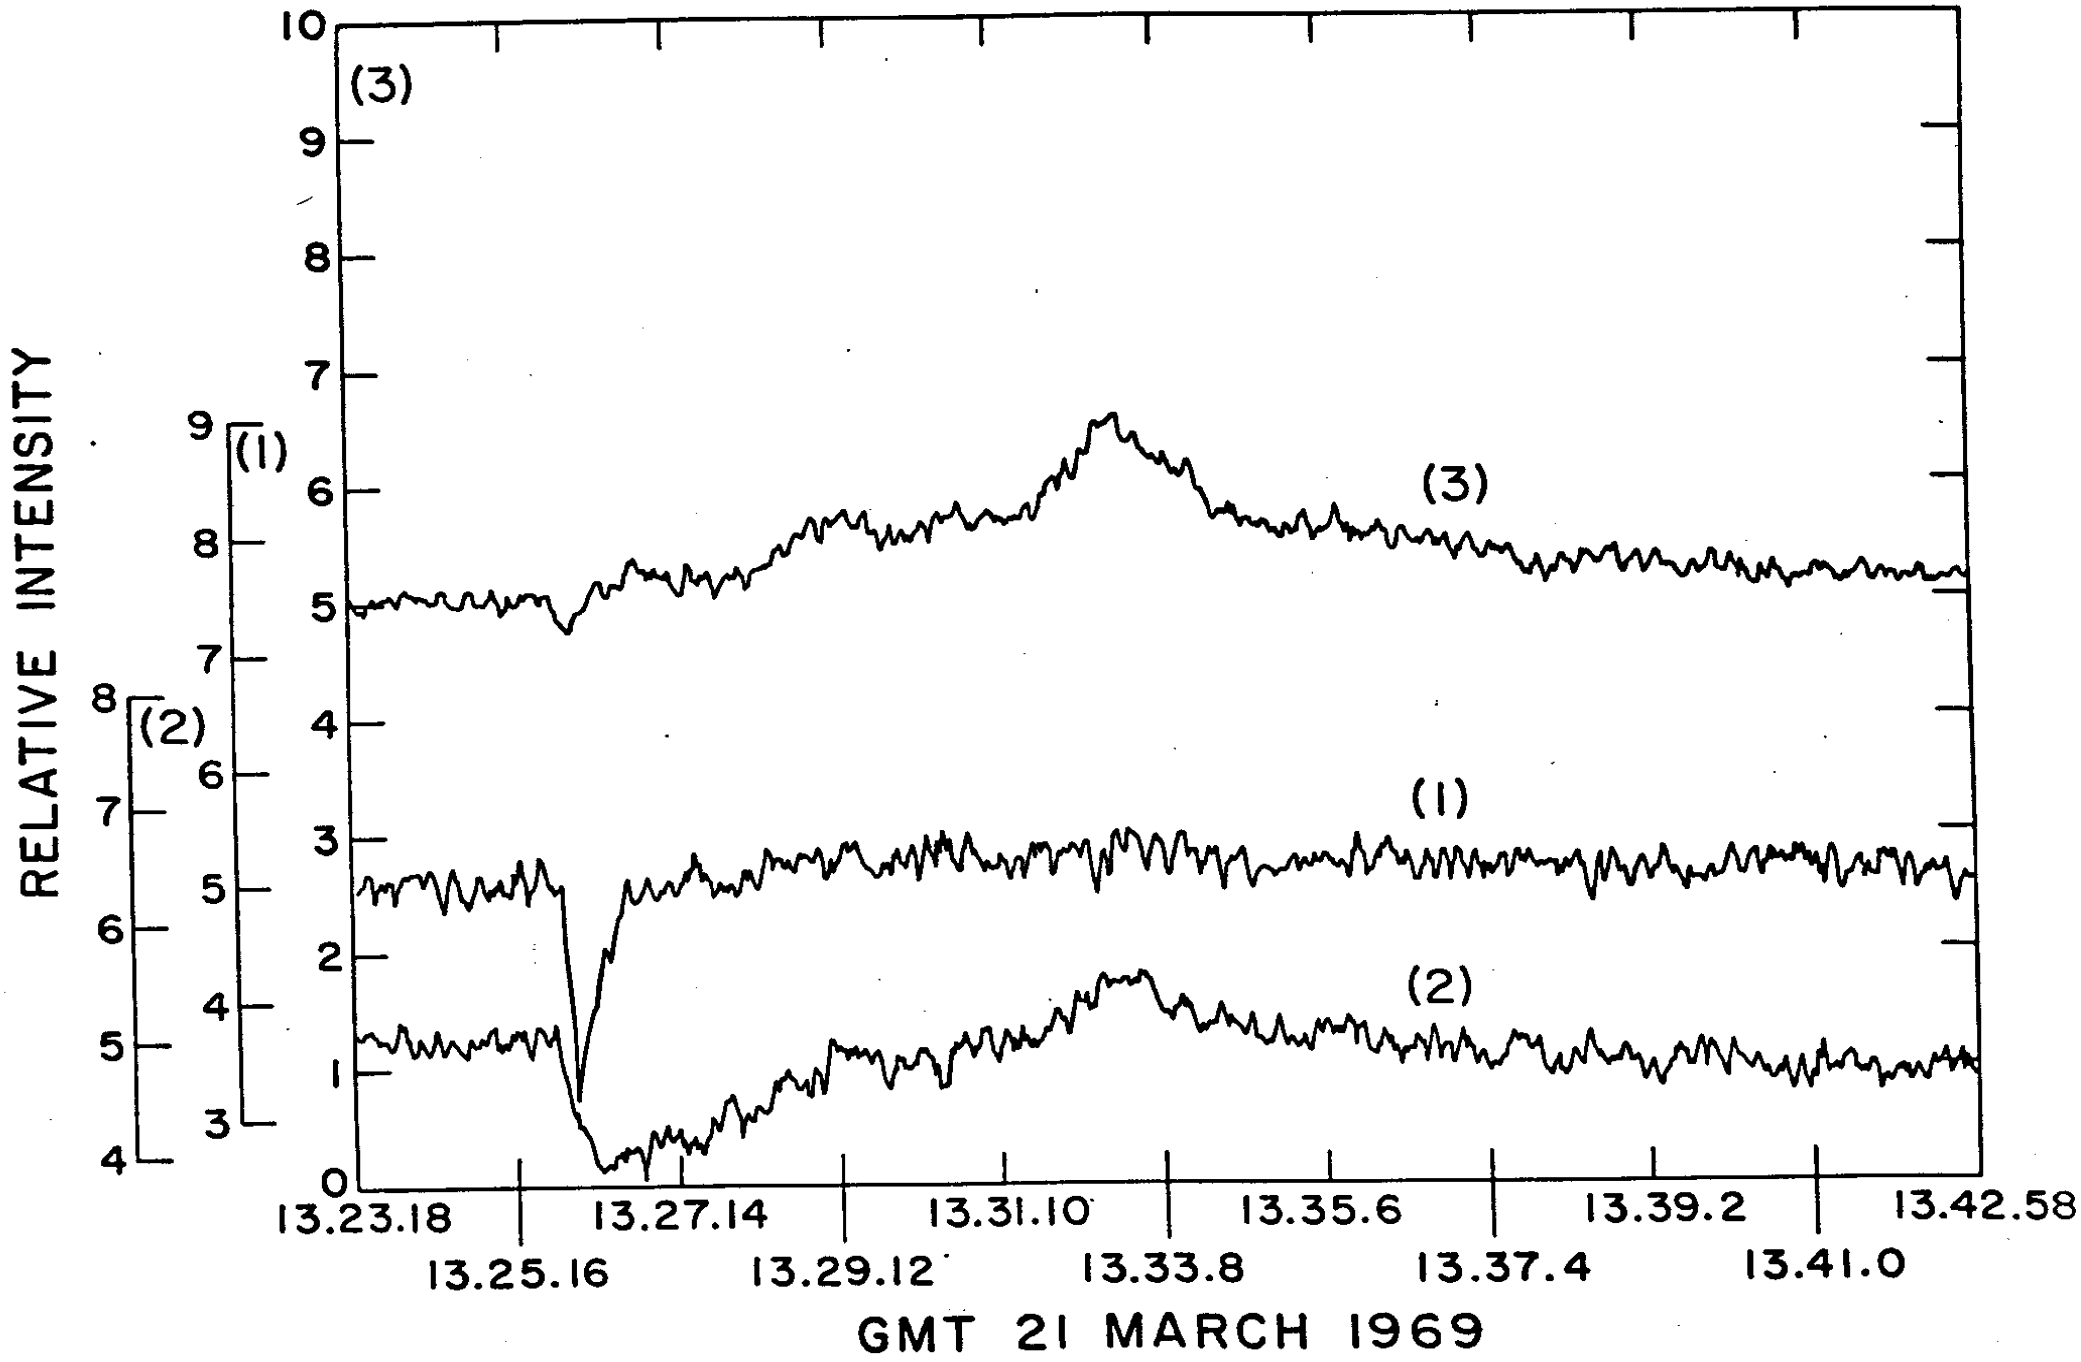
RELATIVE INTENSITY
(3)
(1)
(2)
13.23.18
13.25.16
13.27.14
13.29.12
13.31.10
13.33.8
13.35.6
13.37.4
13.39.2
13.41.0
13.42.58
GMT 21 MARCH 1969

Figure 7.

Solar Flare of April 21, 1969

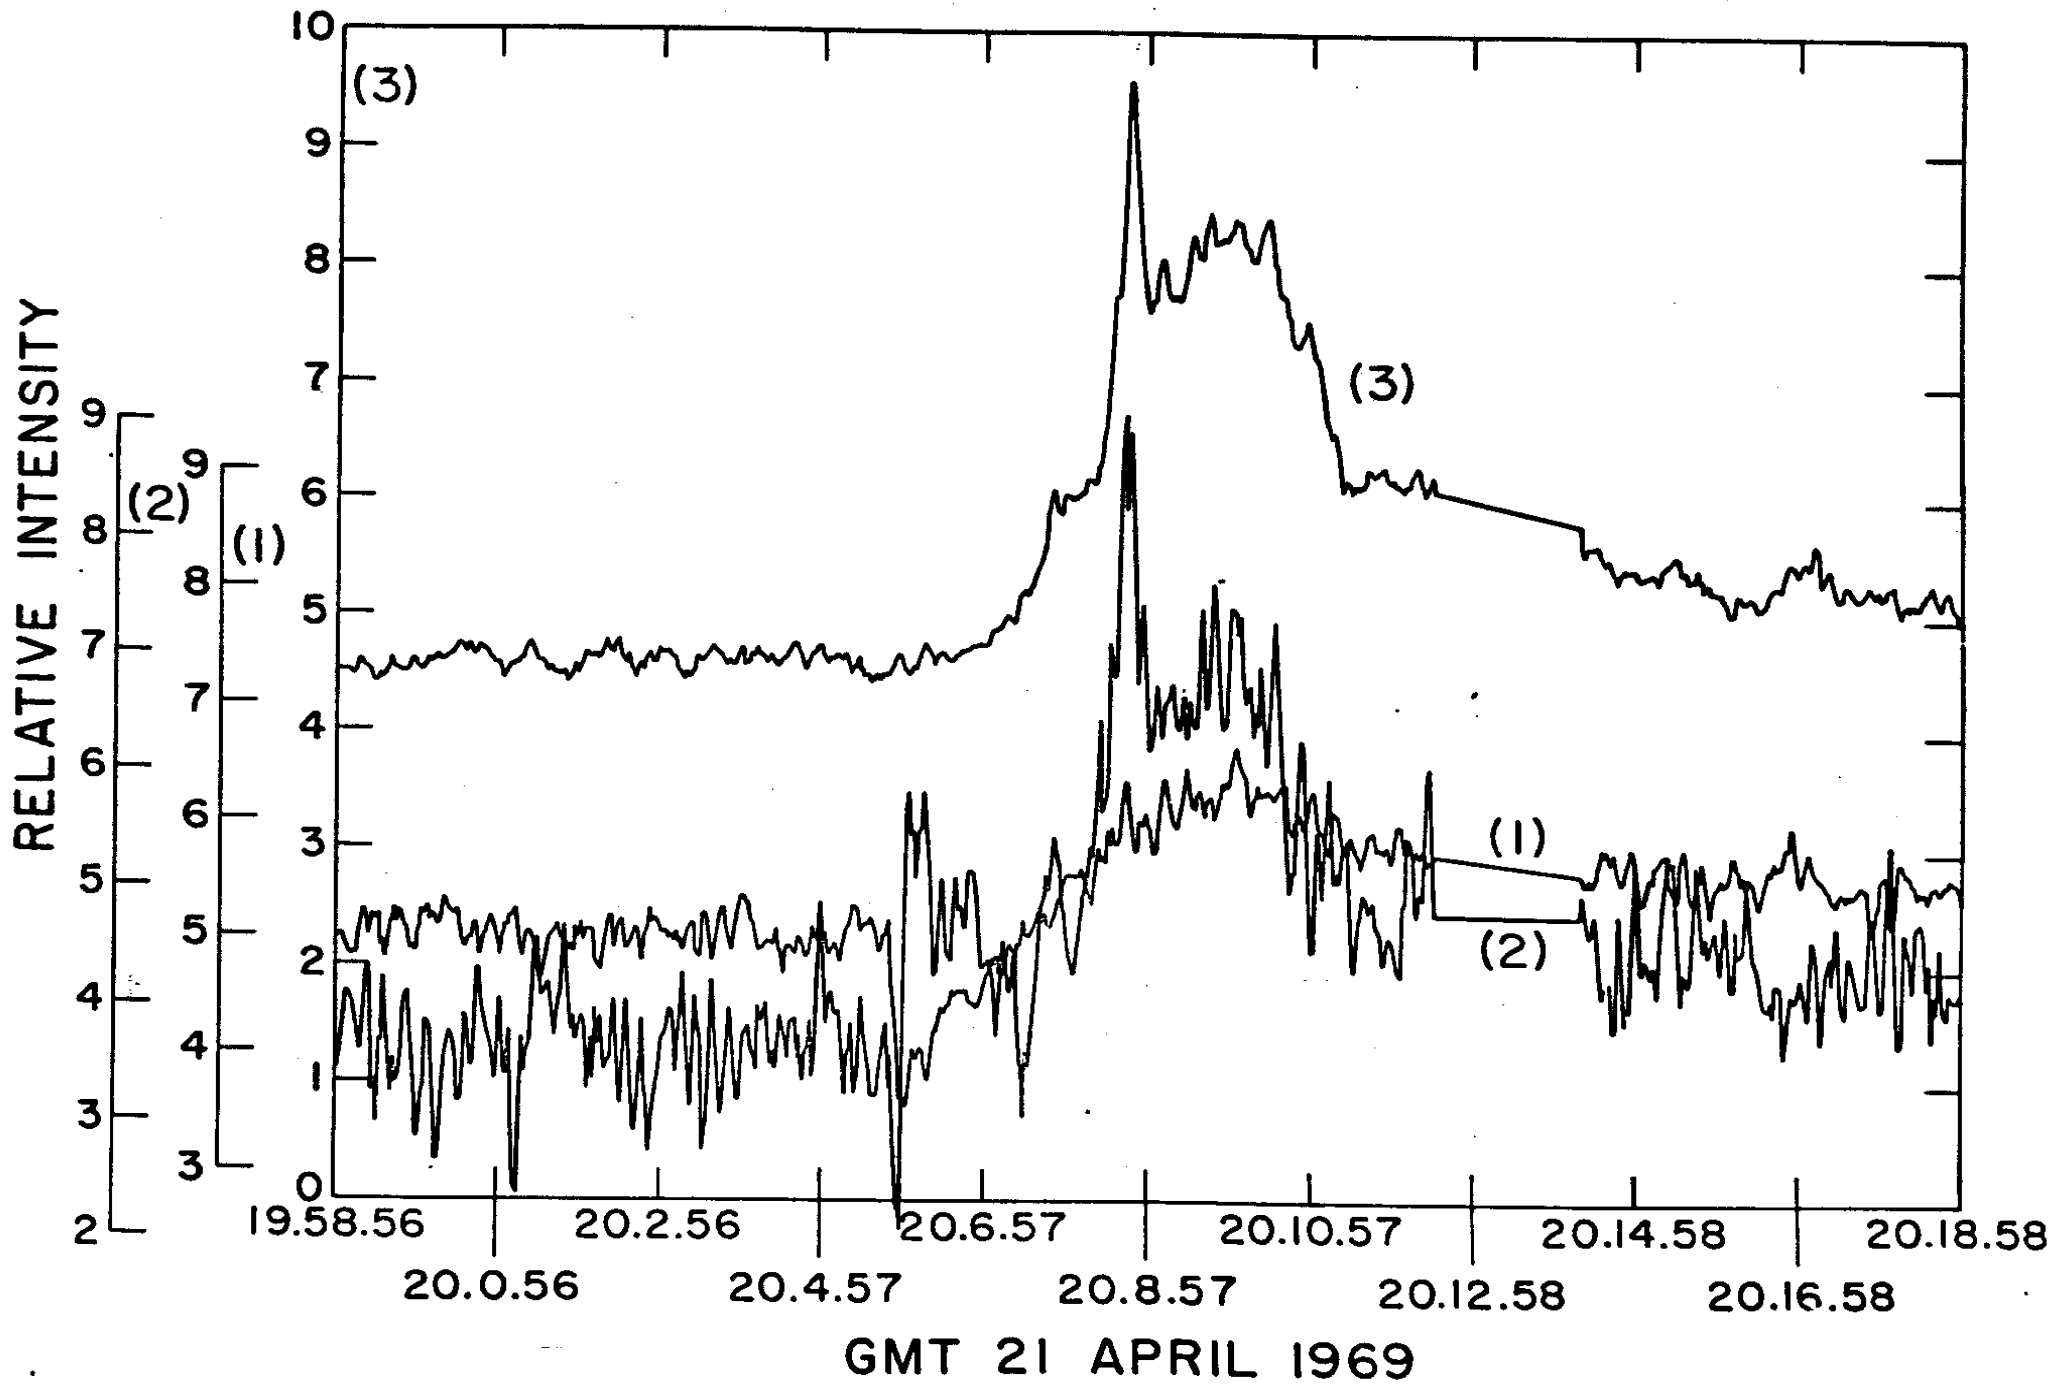
RELATIVE INTENSITY
(1)
(2)
(3)
19.58.56
20.0.56
20.2.56
20.4.57
20.6.57
20.8.57
20.10.57
20.12.58
20.14.58
20.16.58
20.18.58
GMT 21 APRIL 1969

10^{29}; March 21, 7.0×10^{28}, 4.0×10^{28} and $1.3. \times 10^{29}$; April 21, 1.3×10^{29}, 1.6×10^{29} and 2.2×10^{29},

A comparison of available data on 2800/mc/sec radio emission during the above flares led to the conclusion that the onset of the first rapid intensity increase in the radio emission was associated with the first impulsive component of the flare EUV radiation. For the April 21 flare, data on hard X-ray emission was available. The time variation of this X-ray component of the flare was similar in considerable detail to that of the EUV components.

An idealized model of a flare is proposed which accounts for the general characteristics of the time variation in the flare EUV. The model is primarily based on the theoretical investigations of Bessey and Kuperus (5) (Bessey, R. J. and Kuperus, M.: 1969, Conference on Chromosphere - Corona Transition Region, Boulder, Colorado) and of Barnes and Sturrock (6) (Barnes, C. W. and Sturrock, P. A.: 1972, AP. J. 174, p. 659). The first of these papers deals with the dynamic and thermal changes that occur in a mass of solar chromospheric plasma when energy is applied to a thin layer. Their computations show that within 200 seconds, for an energy input of about 10^{12} ergs/gm/sec: 1) the original exponential density distribution is replaced by one that is approximately uniform; 2) upward expansion velocities of as much as 50 km/sec could be produced; 3) shock waves could be formed with material streaming up after the shock. These results apply to an idealized situation with no magnetic field present. However, they apply qualitatively if a magnetic field is present, especially where the latter is nearly perpendicular to the photospheric surface. Barnes and Sturrock (loc. cit., above) consider the case with a magnetic field extending from a sunspot to regions symmetrically surrounding the spot, and of opposite polarity. They calculated the energy in possible force-free fields (resulting from twisting due to differential rotation) which have the same boundary conditions and found that, for a sufficient amount of twisting, the energy in the force-free field can be greater than that in an open field having the same photospheric boundary conditions. They propose that in a flare a force-free field, by a series of explosive processes, may change to an open field of lower energy.

The model described here utilizes the results of the above investigators to explain qualitatively the general features of the EUV radiation emitted during

a large flare. Consider the magnetic field associated with an active spot group after it has been twisted by rotation of the spot center. Then, as mentioned above, its energy is greater than that of the original, untwisted field. This energy comes from that associated with the differential rotation of the sun. Next, suppose that the degree of twisting has proceeded to the point that the closed force-free field has energy greater than that of an open field with the same photospheric boundary conditions, namely, it is in a metastable state as pointed out by Barnes and Sturrock in the paper cited above. If heating in some part of the lower region of the plasma engulfed by the magnetic field produces a local energy input over a critical value, given as 10^{12} erg/g/sec by Bessey and Kuperus, then a shock wave will be produced as found by the latter authors (loc. cit.). The material streaming upward after the shock wave opens the magnetic lines of force and provides the mechanism for the explosive transition from the metastable closed field to the lower energy open field. Magnetic energy is released to the plasma to raise its temperature and to accelerate charged particles. This is the part of the flare which corresponds to the impulsive peaks of the EUV time-variation curves (Figures 5,6, and 7). According to Barnes and Sturrock the energy released could be of the order of one-fifth of that in the original current-free magnetic field. The energy given to a charged particle during this phase averages about 100 keV and may be as high as 10^3 keV. The lines of the open field are then reconnected to form a closed field corresponding to the original undistorted field. The energy here released may be of the order of that in the original field and accounts for the main part of the flare energy (Barnes and Sturrock, loc. cit., and Sturrock (7), Solar Physics, in press, and, for the relativistic particles, C. deJager (8), Utrechtse Sterrekundige Overdrukken, No. 92, 1, 1969).

The triggering of the transition from the closed field metastable state to the open field configuration may be the falling of material in prominences (Ch. L. Hyder (9), Solar Physics, Vol. 2, 1967). Much of the EUV flare radiation could be a result of collisional excitation at lower levels after the release of trapped particles when the magnetic field opens. The hard X-rays originate in the same way, as well as some of the radio emission. Those emissions would be associated with the impulsive part of the flare.

C. Solar Eclipse Observations

The solar eclipse observations of March 7, 1970 led to the following conclusions: 1) limb brightening is present for the integrated EUV radiation in channels 1 and 2 (the higher photon energy channels) but not in channel 3. 2) The active regions in the southern hemisphere were brighter than the surrounding regions by factors 3, 4, and 2 for channels 1, 2, and 3, respectively. In the northern hemisphere the active regions were brighter by factors of 2, 4, and 2, respectively.

D. Sunrise and Sunset Data

EUV absorption in the three channels has been observed during sunrise and sunset as viewed from the satellite. The observations were made in a zone between latitudes $\pm 33^{\circ}$. Typical curves, intensity vs. h, are shown in Figure 8, where h is the perpendicular distance between the satellite-sun line and the earth's surface. This type of variation of integrated intensity for each channel can be predicted from a model atmosphere since the wavelength components of the solar EUV in the channels are known, as well as their absorption coefficients for each important atmospheric constituent. Predicted intensity variations for the prevailing CIRA (1965) atmospheric model of the time of the EUV observations were compared with the latter. Within experimental error, the CIRA models accounted for the observed results for channel 2 over several sunrise and sunset data sets at widely-spaced time intervals. Channel 1 showed slightly greater intensity than predicted by the prevailing CIRA model. Channel 3 data, on the average, showed considerably less intensity than that predicted by the prevailing CIRA model.

In order to account for the observed inconsistency of the channel 3 and channel 1 data with the predictions of the CIRA model, it is necessary for one to assume less atomic oxygen and more molecular nitrogen than given by the prevailing CIRA model. If the CIRA model atmosphere is modified so that the atomic oxygen density is reduced by about one-third, and the molecular nitrogen density increased by about a factor of 2, the modified CIRA model will predict intensities in agreement with all three wavelength channels. The change

Figure 8.

EUV Intensity Variations at Sunset

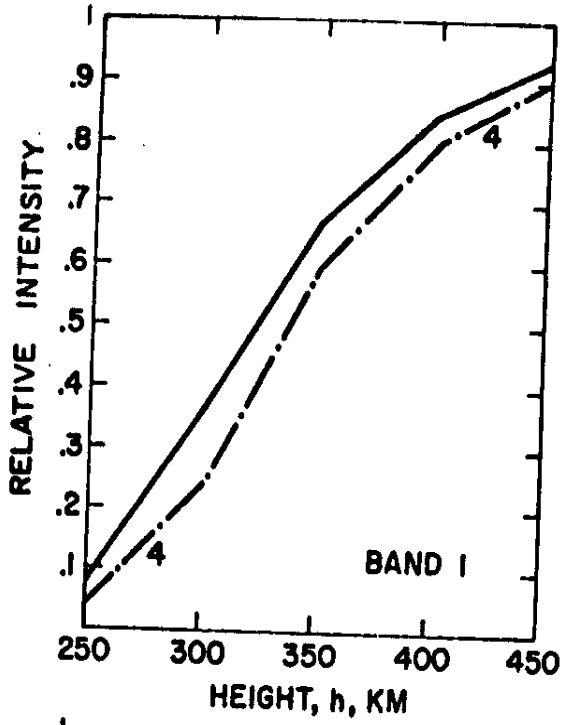
RELATIVE INTENSITY
1
.9
.8
.7
.6
.5
.4
.3
.2
.1
4
4
BAND 1
250
300
350
400
450
HEIGHT, h, KM

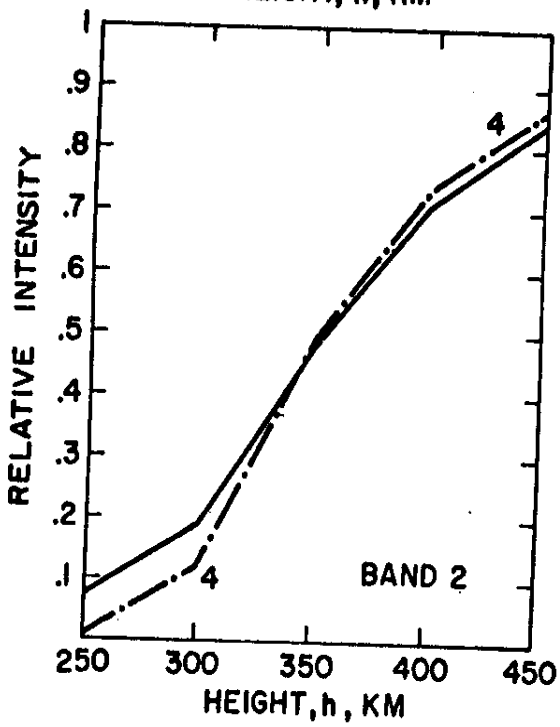
RELATIVE INTENSITY
1
.9
.8
.7
.6
.5
.4
.3
.2
.1
4
4
BAND 2
250
300
350
400
450
HEIGHT, h, KM

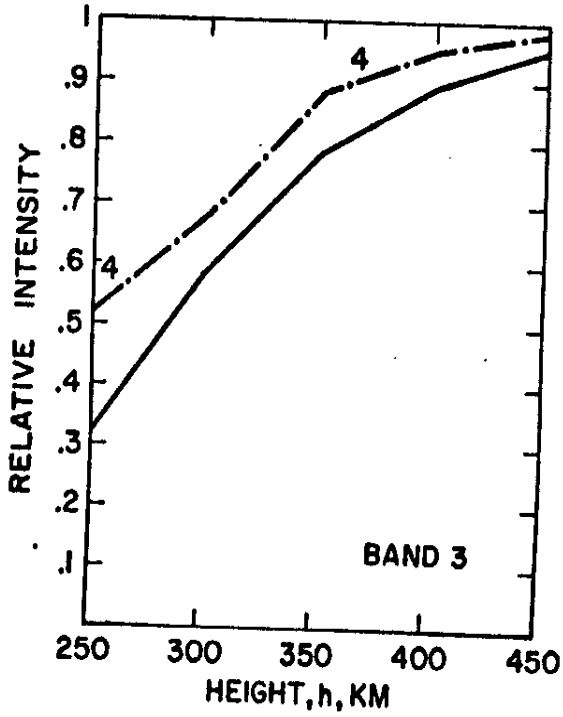
RELATIVE INTENSITY
1
.9
.8
.7
.6
.5
.4
.3
.2
.1
4
4
BAND 3
250
300
350
400
450
HEIGHT, h, KM

has little effect on the overall EUV absorption of channel 2 (where the absorption effects of O and N_2 are comparable) but a large effect (in the correct direction) for channel 3 where absorption by nitrogen dominates. In addition, predicted intensities for channel 1 are slightly greater because this channel is most sensitive to the lowered oxygen density. Other investigators have also observed less atomic oxygen than predicted by the CIRA (1965) model ("Ionospheric Estimates of Atomic Oxygen Concentration from Charged Particle Measurements," Mahajan, K. K., (10), J. Geophys. Res. 76, 4621, 1971).

References

1. Kelly, P. T. and W. A. Rense, "Solar Flares in the EUV Observed from OSO-5," Solar Physics, 1972, to be published.

2. Parker, R. and W. A. Rense, "Observations of March 7, 1970 Solar Eclipse from OSO-5 in Far UV," Report UAG-2, Part III, World Data Center A, Upper Atmosphere Geophysics, April, 1971, p. 417.

3. Solheim, F., "SFD's for Three Large Solar Flares," Thesis, University of Colorado.

4. Allen, K. and W. A. Rense, "Broad Band Solar EUV Absorption in Earth's Upper Atmosphere," submitted for publication in J. Geophys. Res., 1972.

5. Bessey, R. J. and M. Kuperus, 1969, Conference on Chromosphere-Corona Transition Region, Boulder, Colorado.

6. Barnes, C. W. and P. A. Sturrock, "Force-Free Magnetic-Field Structures and Their Role in Solar Activity," Ap. J. 174, 659, 1972.

7. Sturrock, P. A., Solar Physics, in press, 1972.

8. DeJager, C., "Solar Flares: Properties and Problems," Solar Flares and Space Research, North-Holland, Amsterdam, 1969.

9. Hyder, C. L., "A Phenomenological Model for Disparitions Brusques Followed by Flarelike Chromospheric Brightenings," Solar Physics 2, 267, 1967.

10. Mahajan, K. K., "Ionospheric Estimates of Atomic Oxygen Concentration from Charged Particle Measurements," J. Geophys. Res. 76, 4621, 1971.

Acknowledgements

The research described in this report is the result of the work of many people. The authors acknowledge, in particular, the early contributions made by Edward P. Todd and Claire E. Sheldon. Elmo C. Bruner, Jr., contributed significantly to the calibration program and the formulation of scientific objectives. Stephen A. Bundy carried out most of the laboratory optical and calibration work. The basic design and construction of the instrument was accomplished by personnel in the LASP engineering design and shop groups under the direction of Kermit A. Gause and Berthold Glatt. Hassan Bahrami along with Michael Oppenheimer and Kevin G. Jones were responsible for much of the electronics design, assembly, and testing. Richard C. Branan, Mary Lou Dick, M. Murbach and Maureen J. Anderson participated in the initial phases of the data reduction program. The authors are especially grateful to Ronald O. Williams for the bulk of the work involved in the programming and tape-merging procedures required for data reduction and the assembly of the tape library.

T#1 050-5
556, B.N. 7th
82 files,
3/03/69 -
3/20/69

FILE 0001 REC 0001 CH 0504

0001	000000000000	002577150000	000000000000	113400000000	000000001134	000000000000	000001050000	000000000000
0049	010500000000	000000000076	000000000000	000000760000	000000000020	005400000000	000000203560	000000000000
0097	000000376066	155613626777	777717174256	412600000000	777777777777	777777767777	777777777777	777577777777
0145	777777777774	777777777777	777777767777	777777777777	777577777777	777777777774	000000000000	000000000000
0193	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0241	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0289	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0337	777777767777	777777777777	777577777777	777777777774	000000000000	000000000000	000000000000	777777777777
0385	000012416474	000000000000	000000000000	000000000000	336600000000	072061030000	000000001230	365700000000
0433	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0481	000000000000	000000000000	000000000000	000000000000				

FILE 0001 REC 0002 CH 0882

ORBITS # 612-921

D-12183
C-09445

0001	000000000000	000000550000	000000000000	000317257600	000000000000	175176425370	000000001734	536003046000
0049	000060443250	711617777777	173363672671	400000001730	520701707000	000017247114	202550000000	172073471623
0097	600000001722	705054162000	000017207666	235510000000	172645501700	100000001723	740453241000	000017247137
0145	312520000000	605117111624	077777771731	430670351000	000017177515	042520000000	606135526632	577777776063
0193	043501445777	777717305302	525460000000	605512443773	377777771720	705401423000	000016764030	032720000000
0241	606007262013	677777771716	731571505000	000017136215	351760000000	172746064041	200000001721	547577304000
0289	000060661556	136267777777	172241176040	000000001734	640525251000	000017346405	252510000000	171775312007
0337	000000006061	371305513777	777760630334	004607777777	173053102047	000000006055	115170737777	777760623035
0385	442177777777	606237642002	377777776060	012202524777	777717276662	246060000000	605130574511	577777771715
0433	744201364000	000017177525	301640000000	606226771151	377777771726	460437210000	000060543307	742477777777
0481	173464052525	100000001734	640525251000	000017346405	252510000000	173464052525	100000001734	640525251000
0529	000017174256	412600000000	173042757012	000000001731	456000000000	000017257600	000000000000	175175465774
0577	000000001725	760000000000	000017524142	207540000000	172040000000	000000001725	760000000000	000017524011
0625	057340000000	172576000000	000000001752	410436751000	000000000000	000000000000	000000000000	000000000000
0673	175141621000	037700000042	140000005726	000000000000	000060760000	000000000000	000000000000	000000000000
0721	000000000000	000000000000	000000000000	000000001751	435210000377	000000430000	000056000000	000000000000
0769	603400000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000017514532
0817	500003770000	004206000000	560200000000	000000006136	000000000000	100000000000	000000000000	000000000000
0865	000000000000	000000000000	000000000000					

FILE 0001 REC 0003 CH 2910

0001	000000000000	000007400000	000000000000	004017257600	000000000000	175176462620	000000001734	544170074000
0049	000060450255	010737777777	173365457544	200000001730	525005014000	000017247322	014530000000	172056514032
0097	200000001722	717045661000	000017206705	271550000000	172647233704	000000001723	644055577000	000017247345
0145	462450000000	605121053144	477777771731	431077262000	000017177515	052060000000	606135527400	477777776063
0193	043513212777	777717305302	530200000000	605512445053	077777771720	736634221000	000016764102	174670000000
0241	606004674367	177777771716	607565152000	000060722361	020137777777	172747301047	000000006064	303145340777
0289	777760661556	136267777777	172241176063	100000001734	640525251000	000017346405	252510000000	171775312100
0337	500000006061	371313176777	777760630334	124157777777	173053102074	200000006055	115201705777	777760623035
0385	550477777777	606237642730	177777776060	012202053777	777717276662	245620000000	605130574366	277777771715
0433	744170455000	000017177525	311560000000	606226772416	177777771726	460440264000	000060543310	057257777777
0481	173464052525	100000001734	640525251000	000017346405	252510000000	173464052525	100000001734	640525251000
0529	000017174256	412600000000	173042757012	000000001731	456000000000	000017257600	000000000000	175175465774
0577	000000001725	760000000000	000017524142	207540000000	172040000000	000000001725	760000000000	000017524011
0625	057340000000	172576000000	000000001752	410436751000	000000000000	000000000000	000000000000	000000000000
0673	175147061000	037700000042	420000005746	000000000000	000056000000	000000000000	000000000000	000000000000
0721	000000000000	000000000000	000000000000	000000001751	507610000377	000000406600	000057520000	000000000000
0769	576400000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000017515266
0817	100003770000	004270000000	574000000000	000000006032	000000000000	000000000000	000000000000	000000000000
0865	000000000000	000000000000	000000000000	175154465000	037700000042	200000005660	000000000000	000061340000
0913	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000001751	562210000377
0961	000000433000	000060620000	000000000000	571600000000	000000000000	000000000000	000000000000	000000000000
1009	000000000000	000000000000	000017516012	100003770000	004304000000	610400000000	000000006040	000000000000
1057	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	175162021000	037700000044
1105	320000005652	000000000000	000060340000	000000000000	000000000000	000000000000	000000000000	000000000000
1153	000000000000	000000001751	636250000377	000000423600	000000000000	000000000000	000000000000	000000000000
1201	000011000322	440003440000	450003060100	131200000200	131103001311	000017516552	340003770000	004464000000
1249	574400000000	000000006030	000000000000	000000000000	510000150000	000000000000	000004000150	000005000144
1297	100001160000	175167257400	037700000044	020000006224	000000000000	000060260000	000000000000	000000000000
1345	000000000000	000000000000	120001030000	160001502300	013000001751	711574000377	000000435600	000060600000
1393	000000000000	564600000000	000000000000	000000000000	000000000000	000000002500	011600005000	013500000000

FILE 0082 REC 0001 CH 0504

0001	000000000000	002577150000	000000000000	171300000000	000000001713	000000000000	000001050000	000000000000
0049	010500000000	000000000127	000000000000	000001270000	000000000002	666400000000	000000032010	000000000000
0097	000000336065	105266644777	777717174266	544260000000	777777777777	777777767777	777777777777	777577777777
0145	777777777774	777777777777	777777767777	777777777777	777577777777	777777777774	000000000000	000000000000
0193	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0241	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0289	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0337	000031520000	000000000000	267200000000	000000004460	000000000000	047656520000	000000000410	141200000000
0385	000006336310	000000000000	000000000000	000000000000	301200000000	000000000000	000000000000	000000000000
0433	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0481	000000000000	000000000000	000000000000	000000000000				

FILE 0082 REC 0002 CH 0744

0001	000000000000	000000170000	000000000000	000117265340	000000000000	174754503440	000000001734	553403730000
0049	000017325151	553260000000	604410613421	277777771723	635021756000	000060530255	757177777777	605630331172
0097	177777771722	700761327000	000060572143	570557777777	172666554042	000000006054	236556314777	777760530232
0145	000647777777	172742545132	200000001731	431146535000	000017177737	012650000000	171473371452	300000001713
0193	634612164000	000017226534	353670000000	172156153776	100000001720	740233020000	000016764505	146340000000
0241	171775353255	700000001716	426507421000	000060640111	471607777777	172377220153	700000006056	075455174777
0289	777760651052	666447777777	172241671164	200000001721	707152160000	000017356204	064000000000	171777210666
0337	500000001715	444540031000	000017136143	151400000000	172340717201	100000001721	543007551000	000017137366
0385	105240000000	606335541011	777777776060	002016267777	777717304670	572320000000	605125431744	577777776062
0433	343071551777	777717177714	515630000000	606331634473	377777771726	610046002000	000060553561	465207777777
0481	606004455326	077777776063	126660215777	777717165554	732510000000	172756460510	400000001724	516547737000
0529	000017174266	544260000000	172677462746	700000001731	745400000000	000017265340	000000000000	174673007055
0577	000000001726	534000000000	000017476327	324200000000	172040000000	000000001726	534000000000	000017476261
0625	376140000000	172653400000	000000001747	444377610000	000000000000	000000000000	000000000000	000000000000
0673	026350436400	037700002040	400000010200	000000000000	000100000000	000000000000	000000000000	000000000000
0721	000000000000	000000000000	000000000000	000000000000				

FILE 0082 REC 0003 CH 2424

0001	000000000000	000005670000	000000000000	003117265340	000000000000	174754670600	000000001734	541352171000
0049	000017326655	150720000000	604407420256	277777771724	423145415000	000060530114	401127777777	605621651120
0097	177777771722	671714130000	000060573161	710427777777	172670254450	600000006054	335632660777	777760530070
0145	203737777777	172743552425	600000001731	431563304000	000017177737	007520000000	171473374341	700000001713
0193	634636035000	000017226534	621310000000	172156156157	600000001720	751051265000	000016764510	041210000000
0241	171773511760	100000001716	551674201000	000060632632	435647777777	172451420572	300000006055	325656353777
0289	777760650767	037567777777	172241671215	600000001720	605207700000	000017355435	550000000000	171777206774
0337	400000001715	445404474000	000017136141	465400000000	172340776657	200000001721	542653653000	000017137366
0385	317420000000	606335544261	377777776060	002016145777	777717304670	630500000000	605125431660	777777776062
0433	342224263777	777717177714	325540000000	606331632464	377777771726	610125607000	000060553561	301437777777
0481	171467230324	700000006064	026613707777	777760600037	240327777777	173051303645	600000006051	264266602777
0529	777717174266	532140000000	172677462746	700000001731	745400000000	000017265340	000000000000	174673007055
0577	000000001726	534000000000	000017476327	324200000000	172040000000	000000001726	534000000000	000017476261
0625	376140000000	172653400000	000000001747	444377610000	000000000000	000000000000	000000000000	000000000000
0673	026352336400	037700000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
0721	000000000000	000000000000	000000000000	000000000263	540724000377	000000000000	000000000000	000000000000
0769	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000002635577
0817	240003770000	000000000000	000000000000	000000000000	000000000000	000000000000	110003224400	023300004500
0865	030601001003	000002001003	030010030000	026357576400	037700000000	000000000000	000000000000	000000000000
0913	000000000000	000000005100	001500000000	000000000000	040001220000	050001151000	011400000263	613324000377
0961	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000001200
1009	010100001600	015023000123	000002636323	240003770000	000000000000	000000000000	000000000000	000000000000
1057	000000000000	000000000000	000000000000	000025000115	000050000135	000000000000	026365132400	037700000000
1105	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
1153	000000000000	000000000263	667364000377	000000000000	000000000000	000000000000	000000000000	000000000000
1201	000000000000	000000000000	000000000000	000000000000	000000000000	000002637047	240003770000	000000000000
1249	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
1297	000000000000	026372372400	037700000000	000000000000	000000000000	000000000000	000000000000	000000000000
1345	000000000000	000000000000	000000000000	000000000000	000000000263	742724000377	000000000000	000000000000
1393	000000000000	000000000000	000000000000	000011000322	440002340000	450003060100	100400000200	100403001004
1441	000002637607	500003770000	000000000000	000000000000	000000000000	000000000000	000000000000	510000150000
1489	000000000000	000004000122	000005000115	100001140000	026377631000	037700000000	000000000000	000000000000
1537	000000000000	000000000000	000000000000	000000000000	000000000000	120001010000	160001502300	012300000264

FILE 0001 REC 0005 CH 2910

2737	000000000000	000000000000	000000000000	000012000103	000016000156	230001210000	031223256400	037700000000
2785	560000000164	000000000000	000003440000	000000000000	000000000000	000000000000	000000000000	250001150000
2833	500001410000	000000000312	251564000377	000000011000	000001620000	000000000000	041200000000	000000000000
2881	000000000000	000000000000	000000000000	000000000000	000000000000			

FILE 0001 REC 0006 CH 2910

0001	000000000000	000007400000	000000000000	004017265340	000000000000	174762452340	000000006044	207123742777
0049	777717346030	724720000000	604613367654	477777771726	717640304000	000060551027	223547777777	605520212006
0097	677777776056	320541415777	777717224014	140030000000	172762324506	200000001725	400504635000	000060551001
0145	267057777777	605101521410	377777771731	430605102000	000017177736	667760000000	171473503726	200000001713
0193	635615751000	000017226544	674450000000	172156245620	700000001720	424657760000	000016755145	542060000000
0241	606204754655	477777771714	632417746000	000017177574	311230000000	172747101202	200000001726	455575712000
0289	000060650770	603437777777	172241672301	100000001717	421121240000	000017346076	610000000000	171777205435
0337	100000001715	446024516000	000017136151	675450000000	172341035575	000000001721	543605770000	000017137375
0385	322100000000	606335656261	777777776060	002012677777	777717304672	130140000000	605125427601	077777776062
0433	341575774777	777717177714	256570000000	606331734412	377777771726	610164777000	000060553570	614707777777
0481	171770300011	500000001714	557277772000	000060610440	255607777777	172256405736	300000006053	104656517777
0529	777717174266	523270000000	172677462746	700000001731	745400000000	000017265340	000000000000	174673007055
0577	000000001726	534000000000	000017476327	324200000000	172040000000	000000001726	534000000000	000017476261
0625	376140000000	172653400000	000000001747	444377610000	000000000000	000000000000	000000000000	000000000000
0673	031226712400	037700000000	500000000160	000000000000	000003300000	000000000000	000000000000	000000000000
0721	000000000000	000000000000	000000000000	000000000312	306124000377	000000007600	000001500000	000000000000
0769	023000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000003123241
0817	640003770000	000034000000	014000000000	000000000310	000000000000	000000000000	000000000000	000000000000
0865	000000000000	000000000000	000000000000	031234316400	037700000000	640000000152	000000000000	000000000000
0913	000000000000	000000001100	032244000374	000045000306	010013200000	020013200300	132000000312	360510000377
0961	000000005600	000001340000	000000000000	023200000000	000000000000	000051000015	000000000000	000000000400
1009	014600000500	013110000116	000003123775	100003770000	000066000000	016000000000	000000000220	000000000000
1057	000000000000	000000000000	000000000000	000012000103	000016000156	230001210000	031241555000	037700000000
1105	460000000134	000000000000	000002020000	000000000000	000000000000	000000000000	000000000000	250001140000
1153	500001410000	000000000312	433110000377	000000005600	000001500000	000000000000	015600000000	000000000000
1201	000000000000	000000000000	000000000000	000000000000	000000000000	000003124521	100003770000	000064000000
1249	012400000000	000000000160	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
1297	000000000000	031247111000	037700000000	660000000130	000000000000	000001160000	000000000000	000000000000
1345	000000000000	000000000000	000000000000	000000000000	000000000312	507150000377	000000004600	000001220000
1393	000000000000	014000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
1441	000003125245	100003770000	000056000000	012600000000	000000000144	000000000000	000000000000	000000000000
1489	000000000000	000000000000	000000000000	000000000000	031254351000	037700000000	460000000076	000000000000
1537	000001200000	000000000000	000000001100	032244000375	000045000306	010013200000	020013200300	131700000312
1585	562510000377	000000005000	000000740000	000000000000	007400000000	000000000000	000051000015	000000000000
1633	000000000400	014600000500	013010000117	000003126005	500003770000	000022000000	007200000000	000000000056
1681	000000000000	000000000000	000000000000	000000000000	000012000103	000016000156	230001210000	031261611000
1729	037700000000	160000000042	000000000000	000000420000	000000000000	000000000000	000000000000	000000000000
1777	250001150000	500001410000	000000000312	635110000377	000000001000	000000240000	000000000000	002600000000
1825	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000003126531	500003770000
1873	000006000000	000400000000	000000000010	000000000000	000000000000	000000000000	000000000000	000000000000
1921	000000000000	000000000000	031267215000	037700000000	020000000000	000000000000	000000020000	000000000000
1969	000000000000	000000000000	000000000000	000000000000	000000000000	000000000312	707510000377	000000000000
2017	000000040000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
2065	000000000000	000003127265	100003770000	000002000000	000000000000	000000000000	000000000000	000000000000
2113	110003224400	037600004500	030601001320	000002001320	030013200000	031274453400	037700000000	000000000000
2161	000000000000	000000000000	000000000000	000000005100	001500000000	000000000000	040001460000	050001301000
2209	011700000312	763534000377	000000000000	000000020000	000000000000	000000000000	000000000000	000000000000
2257	000000000000	000000001200	010300001600	015623000121	000003130010	740003770000	000000000000	000000000000
2305	000000000000	000000000000	000000000000	000000000000	000000000000	000025000115	000050000140	000000000000
2353	031302007400	037700000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
2401	000000000000	000000000000	000000000000	000000000313	036134000377	000000000000	000000000000	000000000000
2449	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000003130551
2497	340003770000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000
2545	000000000000	000000000000	000000000000	031307247400	037700000000	000000000000	000000000000	000000000000
2593	000000000000	000000000000	000000000000	000000000000	000000000000	000000000000	000000000313	111474000377
2641	000000000000	000000000000	000000000000	000000000000	000000000000	000011000322	440003770000	450003060100
2689	132000000200	132003001320	000003131275	340003770000	000000000000	000000000000	000000000000	000000000000